TOP ALTITUDE: ASSIGNED BY ATC

SOCAL DEP CON
124.3 363.2
D-ATIS DEP
135.65
CLNC DEL
120.35 327.0
CPDLC
GND CON
(N) 121.65 327.0
(S) 121.75 327.0
(W) 121.4 327.0
LOS ANGELES TOWER
(N) 133.9 239.3
(S) 120.95 379.1

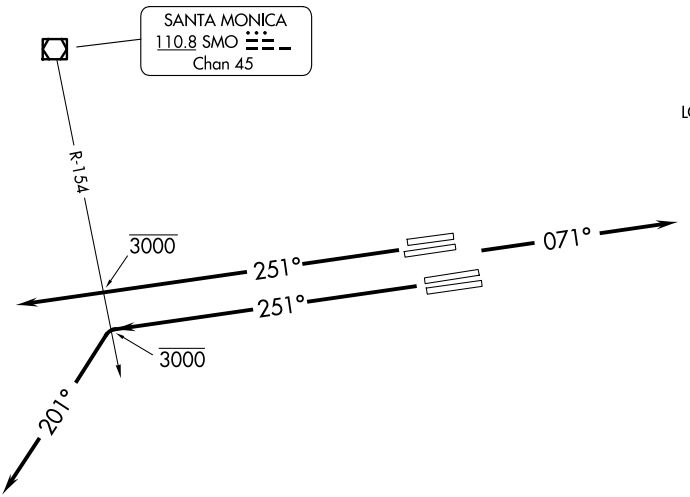

TAKEOFF MINIMUMS
Rwys 6L/R, 7L/R, 24L/R, 25L/R: Standard.

SEAL BEACH
115.7 SLI
Chan 104

NOTE: TAKEOFF RWYS 24L/R, 25L/R: This departure is for non-turbojet aircraft. Turbojet aircraft use LAXX DEPARTURE.
NOTE: South Complex turn at SMO R-154 to 201° is required for ATC separation.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6L/R, 7L/R: Climb on heading 071° for RADAR vectors to SLI VORTAC, thence. . . .

TAKEOFF RUNWAYS 24L/R: Climb on heading 251° to cross SMO R-154 at or below 3000, then RADAR vectors to SLI VORTAC, thence. . . .

TAKEOFF RUNWAYS 25L/R: Climb on heading 251° to cross SMO R-154 at or below 3000, then turn left heading 201° for RADAR vectors to SLI VORTAC, thence. . . .

. . . .on (assigned route). All aircraft expect further clearance to filed altitude 5 minutes after departure.

LOST COMMUNICATIONS: If not in contact with Departure Control within five minutes after departure, climb to FL230 or filed altitude whichever is lower. Aircraft filing FL240 or above climb to filed altitude ten minutes after departure.

SW-3, 03 SEP 2026 to 01 OCT 2026
SW-3, 03 SEP 2026 to 01 OCT 2026