(ZILLI5.ZILLI) 25331
ZILLI FIVE DEPARTURE (RNAV)
AL-237 (FAA)
LOS ANGELES INTL (LAX)
LOS ANGELES, CALIFORNIA

SOCAL DEP CON
124.3 363.2
D-ATIS DEP
135.65
CLNC DEL
120.35 327.0
CPDLC
GND CON
(N) 121.65 327.0
(S) 121.75 327.0
(W) 121.4 327.0
LOS ANGELES TOWER
(N) 133.9 239.3
(S) 120.95 379.1

RNAV 1- GPS.
RADAR required.

TOP ALTITUDE: 14000

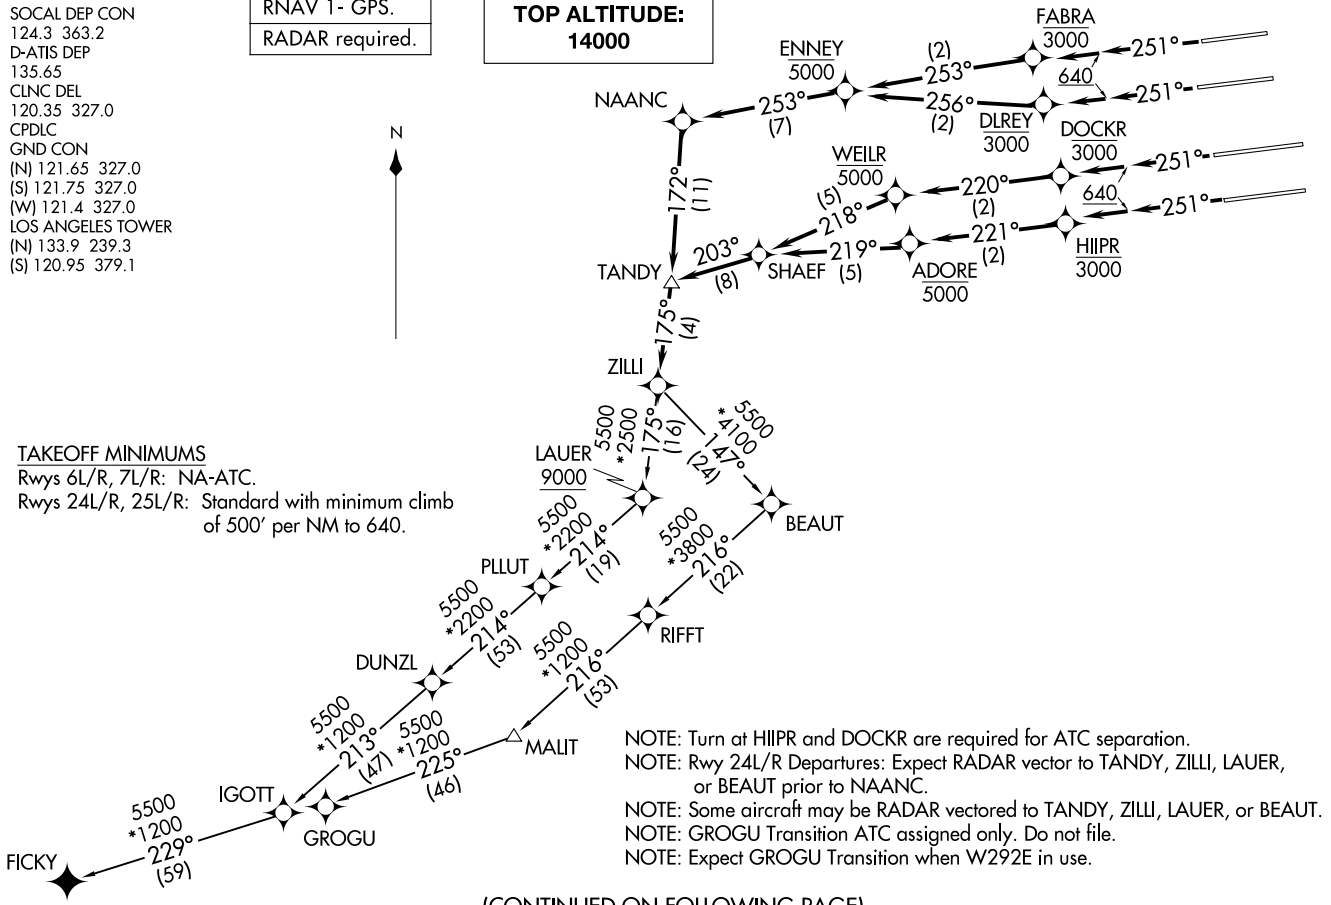

TAKEOFF MINIMUMS
Rwys 6L/R, 7L/R: NA-ATC.
Rwys 24L/R, 25L/R: Standard with minimum climb of 500′ per NM to 640.

NOTE: Turn at HIIPR and DOCKR are required for ATC separation.
NOTE: Rwy 24L/R Departures: Expect RADAR vector to TANDY, ZILLI, LAUER, or BEAUT prior to NAANC.
NOTE: Some aircraft may be RADAR vectored to TANDY, ZILLI, LAUER, or BEAUT.
NOTE: GROGU Transition ATC assigned only. Do not file.
NOTE: Expect GROGU Transition when W292E in use.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.