APP CRS	Rwy Ldg	12245
079°	TDZE	14
	Apt Elev	14

RNAV (RNP) Z RWY 8L

DANIEL K INOUYE INTL (HNL) (PHNL)

RNP AR APCH - GPS. Authorization required. From XUSLY or JIBNI: RF

For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.15 DA all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold.

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6

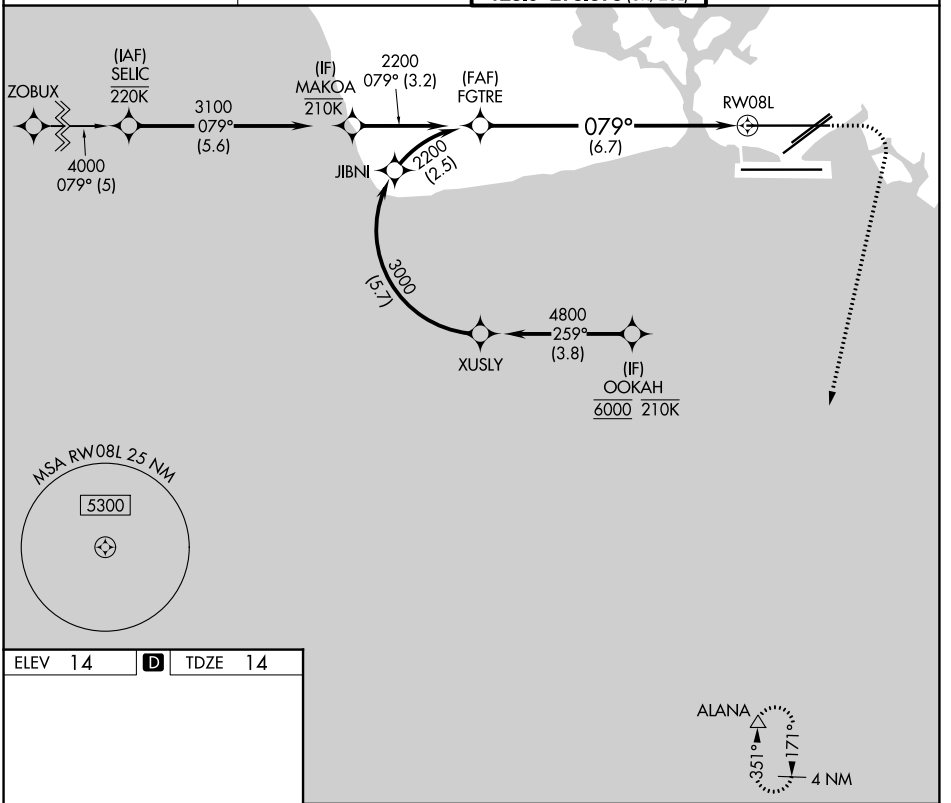

ELEV 14 | D | TDZE 14



MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R, and 26R
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L

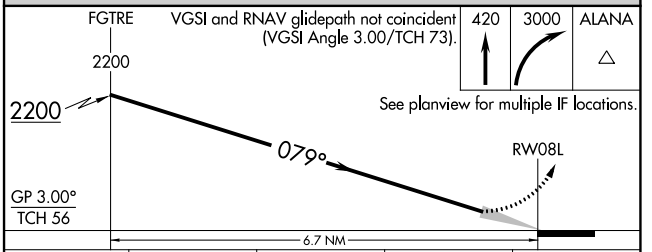

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

420	3000	ALANA
↑	↗	△

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.15 DA	285-½	271 (300-½)		
RNP 0.30 DA	347-½	333 (400-½)		

AUTHORIZATION REQUIRED

PAC, 03 SEP 2026 to 29 OCT 2026
PAC, 03 SEP 2026 to 29 OCT 2026