RNAV (GPS) RWY 32

CHEROKEE COUNTY (JSO)

WAAS	APP CRS	Rwy Ldg	5006
CH 90327	315°	TDZE	665
W32A		Apt Elev	678

Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase DA 118 feet, increase all MDA 120 feet and LPV, LNAV/VNAV visibility all Cats ¼ mile, LNAV and Circling Cat C visibility ⅜ mile. When VGSI inop, Straight-in/Circling Rwy 32 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3100 direct WOSUL and hold.

AWOS-3PT	LONGVIEW APP CON ★	UNICOM
119.075	128.75 379.15	122.7 (CTAF) L

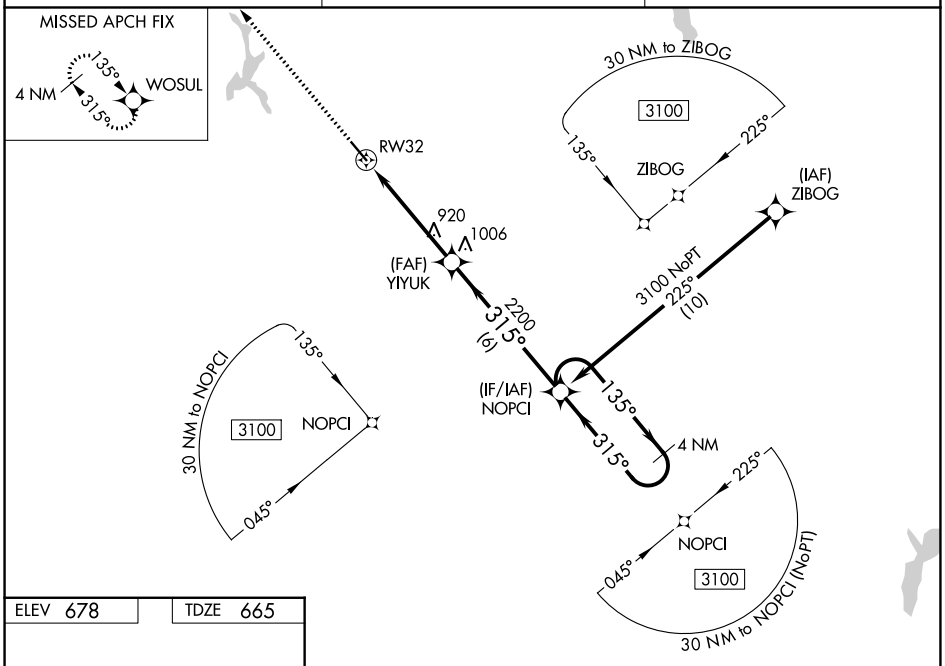

ELEV 678 TDZE 665

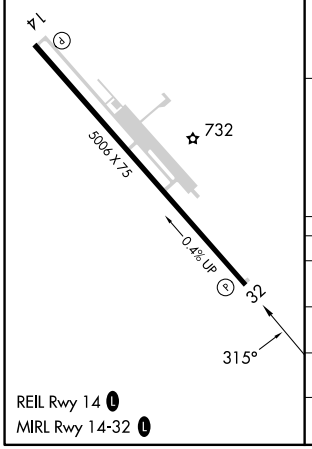

REIL Rwy 14 L
MIRL Rwy 14-32 L

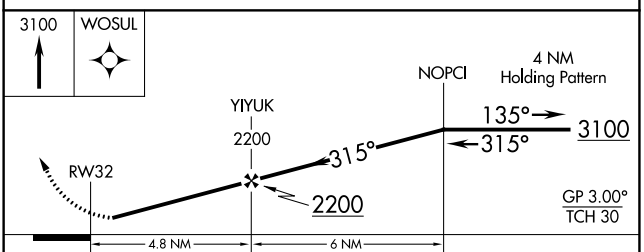

CATEGORY	A	B	C	D
LPV DA	915-1 250 (300-1)			NA
LNAV/VNAV DA	915-1 250 (300-1)			NA
LNAV MDA	1220-1 555 (600-1)		1220-1⅝ 555 (600-1⅝)	NA
CIRCLING	1220-1 542 (600-1)		1280-1¾ 602 (700-1¾)	NA

SC-5, 03 SEP 2026 to 01 OCT 2026
SC-5, 03 SEP 2026 to 01 OCT 2026