OLD

WILMINGTON, DELAWARE | AL-458 (FAA) | 25275

# VOR RWY 9

NEW CASTLE (ILG)

| VORTAC DQO | APP CRS | Rwy Ldg 7000 |
|---|---|---|
| ~~114.0~~ | 094° | TDZE 80 |
| Chan ~~87~~ | | Apt Elev 80 |

T A VDP NA when using Philadelphia Intl altimeter setting. When local altimeter setting not received, use Philadelphia Intl altimeter setting and increase all MDAs 60 feet and Circling visibility Cats A and D ¼ SM.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 direct DQO VORTAC then on DQO VORTAC R-274 to GLEEM INT/DQO 5.1 DME and hold.

| ATIS | PHILADELPHIA APP CON | WILMINGTON TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 123.95 | 118.35 323.1 | 126.0 L (CTAF) 352.05 | 121.7 275.8 | 122.95 |

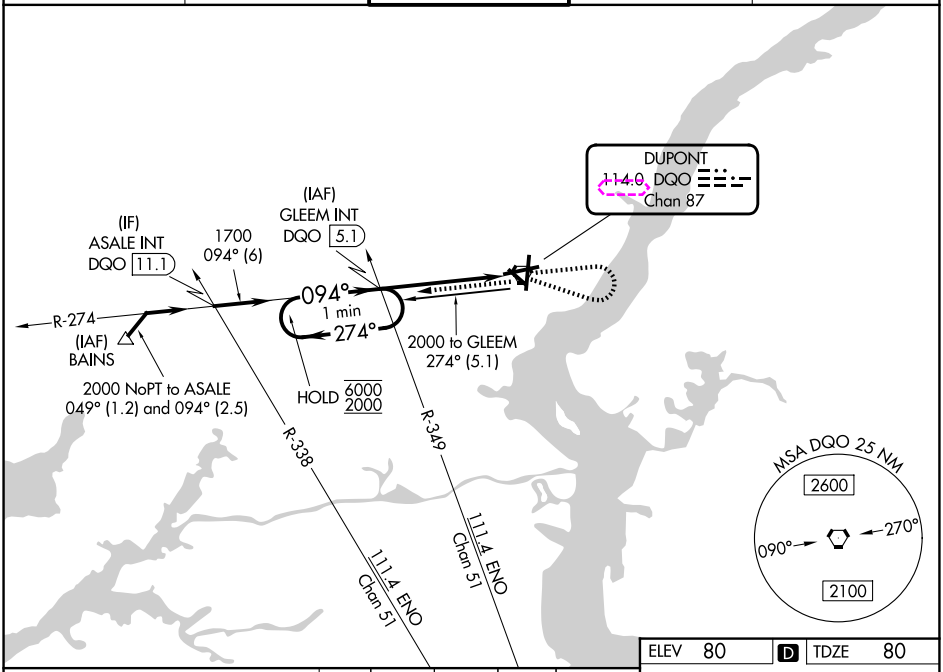


ELEV 80 | D | TDZE 80

| 1200 | 2000 | DQO | DQO R-274 | GLEEM INT |
|---|---|---|---|---|

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 61).

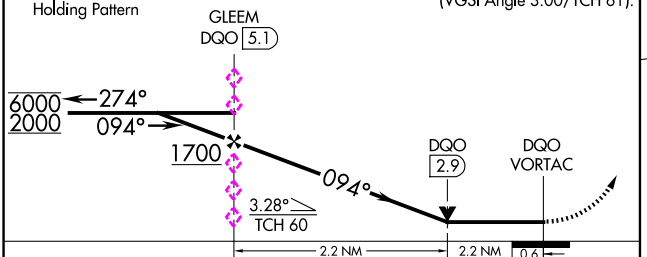


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-9 | 860-1 780 (800-1) | 860-1¼ 780 (800-1¼) | 860-2½ | 780 (800-2½) |
| CIRCLING | 860-1 780 (800-1) | 860-1¼ 780 (800-1¼) | 860-2½ | 780 (800-2½) |




REIL Rwys 9, 19 and 27 L
HIRL Rwys 1-19 and 9-27 L
MIRL Rwy 14-32 L

FAF to MAP 5.1 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:06 | 3:24 | 2:33 | 2:02 | 1:42 |

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026

NEW

WILMINGTON, DELAWARE | AL-458 (FAA) | 26246

# VOR RWY 9

NEW CASTLE (ILG)

| VORTAC DQO | APP CRS | Rwy Ldg 7000 |
|---|---|---|
| ~~114.0~~ | 094° | TDZE 80 |
| Chan ~~87~~ | | Apt Elev 80 |

T A VDP NA when using Philadelphia Intl altimeter setting. When local altimeter setting not received, use Philadelphia Intl altimeter setting and increase all MDAs 60 feet and Circling visibility Cats A and D ¼ SM.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 direct DQO VORTAC then on DQO VORTAC R-274 to GLEEM INT/DQO 5.1 DME and hold.

| ATIS | PHILADELPHIA APP CON | WILMINGTON TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 123.95 | 118.35 323.1 | 126.0 L (CTAF) 352.05 | 121.7 275.8 | 122.95 |

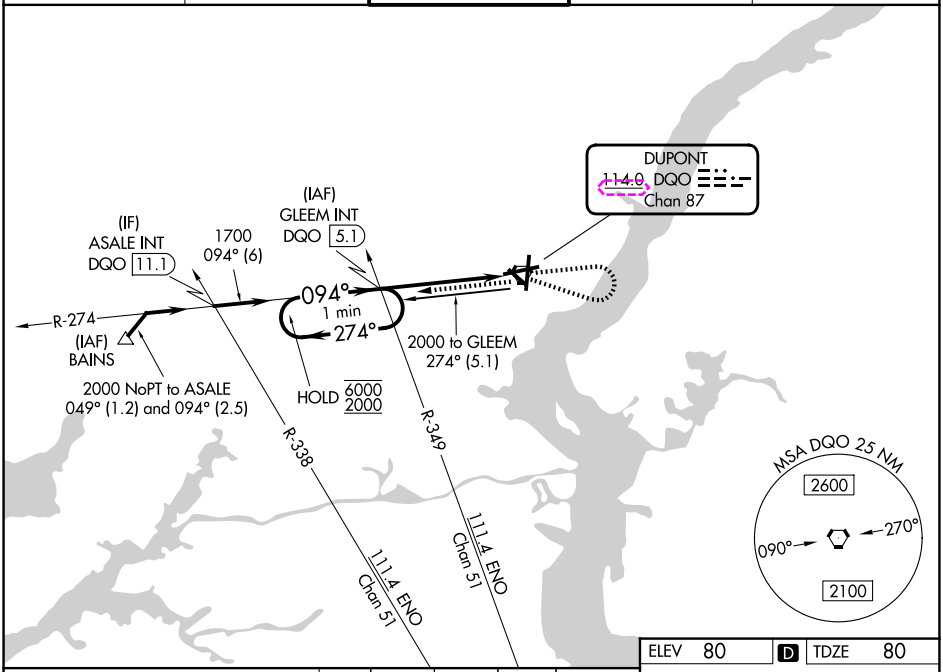


ELEV 80 | D | TDZE 80

| 1200 | 2000 | DQO | DQO R-274 | GLEEM INT |
|---|---|---|---|---|

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 61).

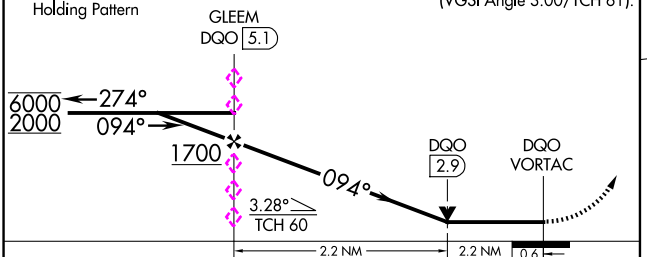





REIL Rwys 9, 19 and 27 L
HIRL Rwys 1-19 and 9-27 L
MIRL Rwy 14-32 L

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-9 | 860-1 780 (800-1) | 860-1¼ 780 (800-1¼) | 860-2½ | 780 (800-2½) |
| CIRCLING | 860-1 780 (800-1) | 860-1¼ 780 (800-1¼) | 860-2½ | 780 (800-2½) |

FAF to MAP 5.1 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:06 | 3:24 | 2:33 | 2:02 | 1:42 |

NE-3, 03 SEP 2026 to 01 OCT 2026

NE-3, 03 SEP 2026 to 01 OCT 2026