OLD

RUTLAND, VERMONT

AL-968 (FAA)

25219

RNAV (GPS) Z RWY 19

RUTLAND/SOUTHERN VERMONT RGNL (RUT)

WAAS CH 93730 W19B	APP CRS 194°	Rwy Ldg 5004
		TDZE 787
		Apt Elev 787

RNP APCH - GPS.

Circling NA northeast of Rwys 19 and 31. Circling Rwy 13, 31 NA at night. Inop table does not apply to LNAV/VNAV all Cats. Baro-VNAV NA. For inop ALS, increase LPV all Cats visibility to 1⅛ miles. VDP NA when using VSF altimeter setting. For inop ALS while using VSF altimeter setting, increase LPV all Cats visibility to 1⅜ miles. Inop table does not apply when using VSF altimeter setting to LNAV/VNAV all Cats and LNAV Cat C. When local altimeter setting not received, use VSF altimeter setting and increase LPV DA to 1281 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2230 feet; increase all MDAs 80 feet and LNAV visibility Cat C ½ SM.

-7°C

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 5700 direct JOGIM and hold, continue climb-in-hold to 5700.
† Missed approach requires minimum climb of 420 feet per NM to 3200; if unable to meet climb gradient, see RNAV (GPS) Y Rwy 19.

AWOS-3PT	BOSTON CENTER	UNICOM
118.375	135.7 282.2	122.8 (CTAF) L

(IAF) BURLINGTON BTV

5700 NoPT 180° (36.6)

HOLD 6000 5700

5 NM

014°

194°

(IAF) MONTPELIER MPV

5700 NoPT 248° (27.6)

Procedure NA for arrival on BTV VOR/DME airway radials 135 CW 202.

Procedure NA for arrival on MPV VOR/DME airway radials 173 CW 237.

4800 194° (3.6)

(IF/IAF) GITKE

3900 194° (3.6)

LECEG

(FAF) CEKRA

CIBTO 6.1 NM to RW19

1779 ±

RW19

MSA RW19 25 NM

5400

Procedure NA for arrivals at JOGIM on V487 southbound.

5700 to GITKE 047° (30.2)

MISSED APCH FIX

5 NM

197°

017°

JOGIM

JOGIM

5 NM Holding Pattern

GITKE

LECEG

CEKRA

CIBTO 6.1 NM to RW19

3 NM to RW19

RW19

6000 5700

014°

194°

194°

4800

3900

2900

3900

GP 3.20°

TCH 54

1500 5700 JOGIM

3.6 NM 3.6 NM 2.9 NM 3.1 NM 3 NM

CATEGORY	A	B	C	D
LPV DA†	1201-¾ 414 (500-¾)			NA
LNAV/VNAV DA	2150-5 1363 (1400-5)			NA
LNAV MDA†	1820-¾ 1033 (1100-¾)	1820-1 1033 (1100-1)	1820-2½ 1033 (1100-2½)	NA
CIRCLING	2560-1¼ 1773 (1800-1¼)	2560-1½ 1773 (1800-1½)	2560-3 1773 (1800-3)	NA

ELEV 787 D TDZE 787

194°

6

13

31

5004 X 100

3169 X 75

849

HIRL Rwy 1-19 L

MIRL Rwy 13-31 L

REIL Rwy 13 L

NE-1, 06 AUG 2026 to 03 SEP 2026

NE-1, 06 AUG 2026 to 03 SEP 2026

NEW

RUTLAND, VERMONT | AL-968 (FAA) | 26246

RNAV (GPS) Z RWY 19

RUTLAND/SOUTHERN VERMONT RGNL (RUT)

WAAS CH 93730 W19B	APP CRS 194°	Rwy Ldg 5004	TDZE 787	Apt Elev 787

RNP APCH - GPS.

Circling NA northeast of Rwys 19 and 31. Circling Rwy 13, 31 NA at night. Inop table does not apply to LNAV/VNAV all Cats. Baro-VNAV NA. For inop ALS, increase LPV all Cats visibility to 1⅛ miles. VDP NA when using VSF altimeter setting. For inop ALS while using VSF altimeter setting, increase LPV all Cats visibility to 1⅜ miles. Inop table does not apply when using VSF altimeter setting to LNAV/VNAV all Cats and LNAV Cat C. When local altimeter setting not received, use VSF altimeter setting and increase LPV DA to 1281 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2230 feet; increase all MDAs 80 feet and LNAV visibility Cat C ½ SM.

-7°C

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 5700 direct JOGIM and hold, continue climb-in-hold to 5700.
† Missed approach requires minimum climb of 420 feet per NM to 3200; if unable to meet climb gradient, see RNAV (GPS) Y Rwy 19.

AWOS-3PT	BOSTON CENTER	UNICOM
118.375	135.7 282.2	122.8 (CTAF) L

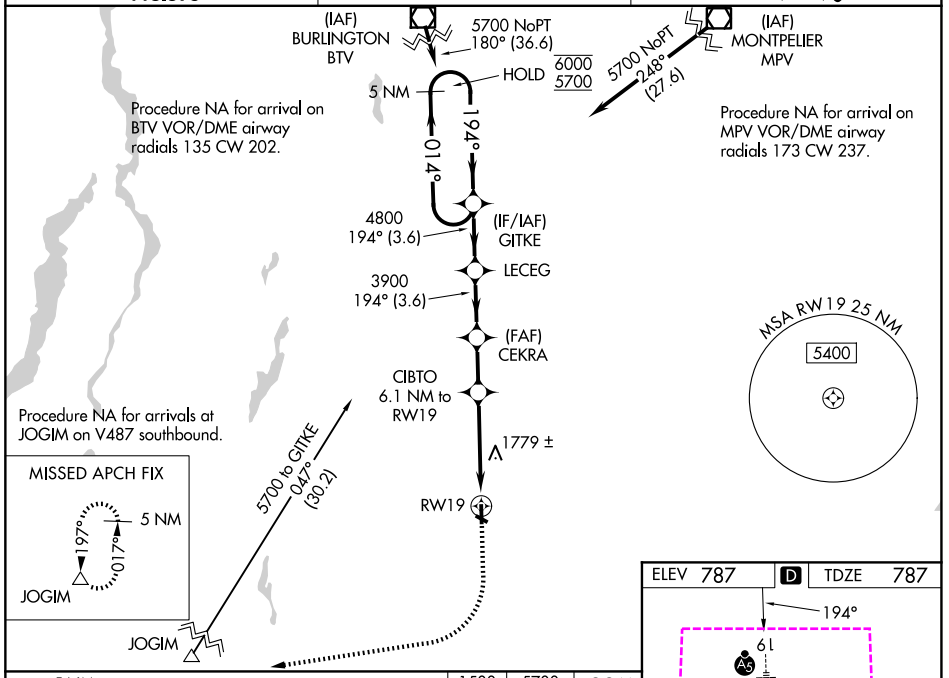

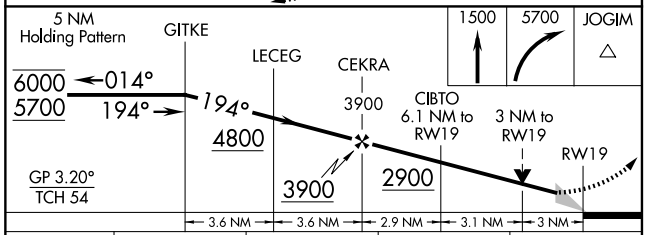

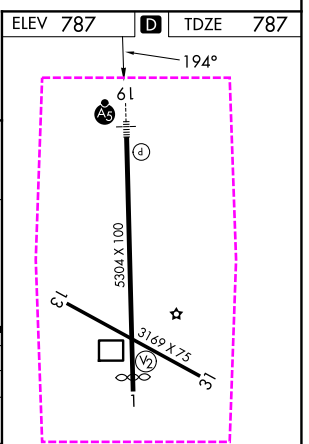

CATEGORY	A	B	C	D
LPV DA†	1201-¾	414 (500-¾)		NA
LNAV/VNAV DA	2150-5	1363 (1400-5)		NA
LNAV MDA†	1820-¾ 1033 (1100-¾)	1820-1 1033 (1100-1)	1820-2½ 1033 (1100-2½)	NA
CIRCLING	2560-1¼ 1773 (1800-1¼)	2560-1½ 1773 (1800-1½)	2560-3 1773 (1800-3)	NA

HIRL Rwy 1-19 L
MIRL Rwy 13-31 L
REIL Rwy 13 L

NE-1, 03 SEP 2026 to 01 OCT 2026

NE-1, 03 SEP 2026 to 01 OCT 2026