RNAV (GPS) RWY 36

ST LANDRY PARISH (OPL)

WAAS CH 73027 W36A	APP CRS 359°	Rwy ldg 5210 TDZE 74 Apt Elev 75

Baro-VNAV NA when using Lafayette altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When VGSI inop, Straight-in/Circling Rwy 36 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 6/24 NA at night. When local altimeter setting not received, use Lafayette altimeter setting: Increase LPV DA to 407 feet, LNAV/VNAV DA to 749 feet, and visibility LPV all Cats ⅛ SM and LNAV/VNAV all Cats ¼ SM; increase all MDA 60 feet and visibility LNAV Cats C and D ⅛ SM and Circling Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2000 direct JUGBO and hold.

AWOS-3PT	LAFAYETTE APP CON ★	UNICOM
118.775	128.7 268.7	123.0 (CTAF) L

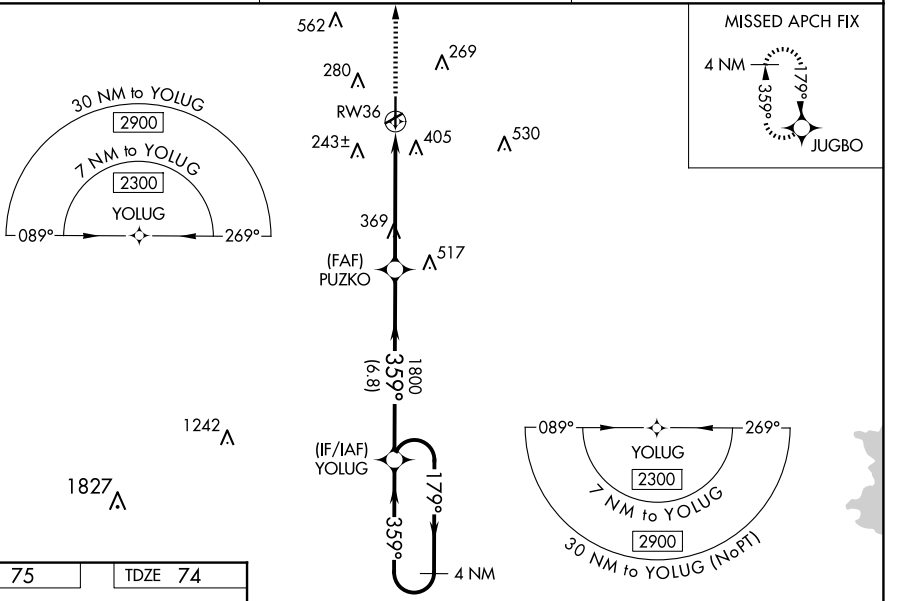

ELEV 75 TDZE 74

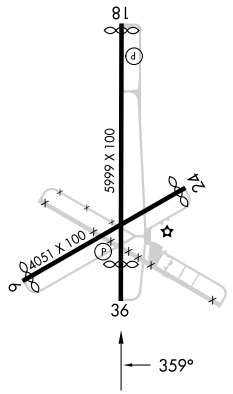

REIL Rwys 18 and 36 L
MIRL Rwy 18-36 L

2000 JUGBO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 59).

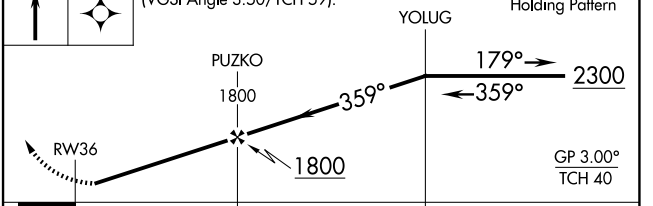

CATEGORY	A	B	C	D
LPV DA	351-1 277 (300-1)			
LNAV/VNAV DA	693-2¼ 619 (700-2¼)			
LNAV MDA	620-1 546 (600-1)		620-1⅝ 546 (600-1⅝)	
CIRCLING	780-1 705 (800-1)		780-2 705 (800-2)	920-2¾ 845 (900-2¾)

SC-4, 01 OCT 2026 to 29 OCT 2026
SC-4, 01 OCT 2026 to 29 OCT 2026