RNAV (GPS) RWY 23

CRAWFORDSVILLE RGNL (CFJ)

WAAS CH 60941 W23A	APP CRS 227°	Rwy Ldg 5003 TDZE 799 Apt Elev 800

RNP APCH - GPS.

Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using GPC altimeter setting. When local altimeter setting not received, use GPC altimeter setting: increase LPV DA to 1111 feet, LNAV/VNAV DA to 1252 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV and Circling Cats C and D visibilities ¼ SM.

MISSED APPROACH: Climb to 2700 direct YONUG and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
125.65	119.05 317.8	122.8 (CTAF) L

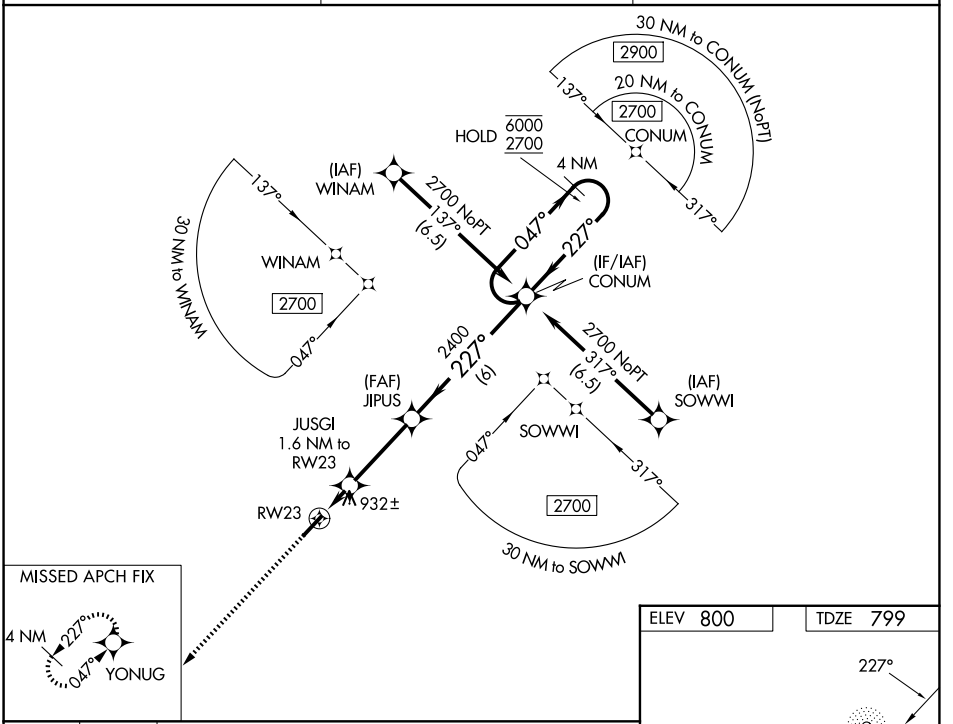

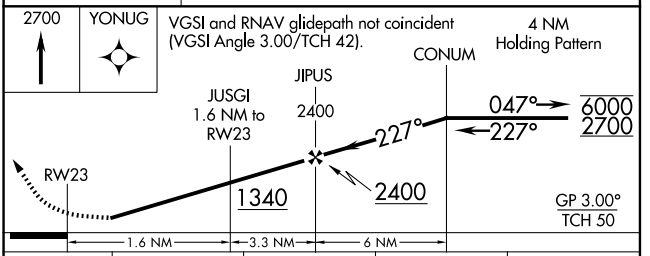

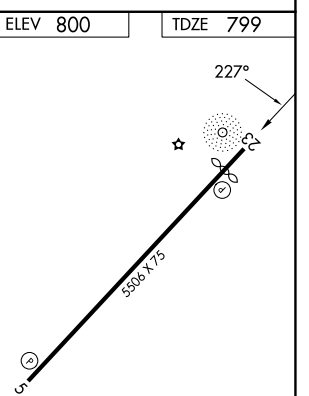

CATEGORY	A	B	C	D
LPV DA	1059-1	260 (300-1)		
LNAV/ VNAV DA	1200-1⅛	401 (400-1⅛)		
LNAV MDA	1200-1	401 (400-1)	1200-1⅛	401 (400-1⅛)
CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1¾ 640 (700-1¾)	1520-2¼ 720 (800-2¼)

REIL Rwys 5 and 23 L
MIRL Rwy 5-23 L

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026