| WAAS | APP CRS | Rwy Ldg | 5506 |
|---|---|---|---|
| CH 82739 | 047° | TDZE | 797 |
| W05A | | Apt Elev | 800 |

# RNAV (GPS) RWY 5

## CRAWFORDSVILLE RGNL (CFJ)

RNP APCH - GPS.

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using GPC altimeter setting. When local altimeter setting not received, use GPC altimeter setting: increase LPV DA to 1128 feet; LNAV/VNAV DA to 1248 feet and all visibilities ¼ SM; increase all MDAs 60 feet and Circling Cats C and D visibilities ¼ SM.

MISSED APPROACH: Climb to 2700 direct CONUM and hold.

| AWOS-3PT | INDIANAPOLIS APP CON | UNICOM |
|---|---|---|
| 125.65 | 119.05 317.8 | 122.8 (CTAF) L |

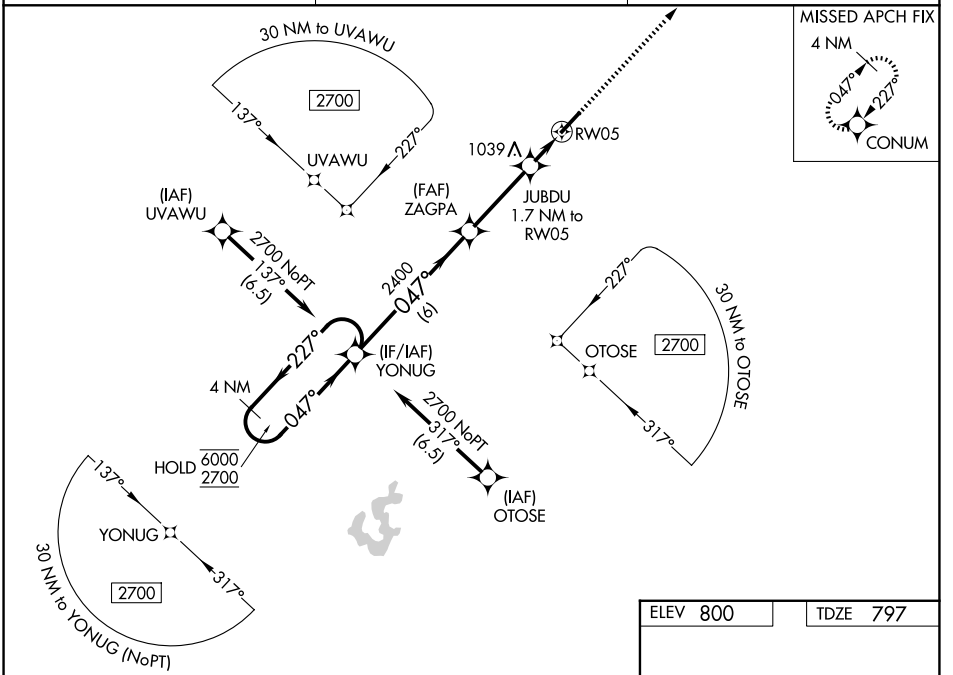


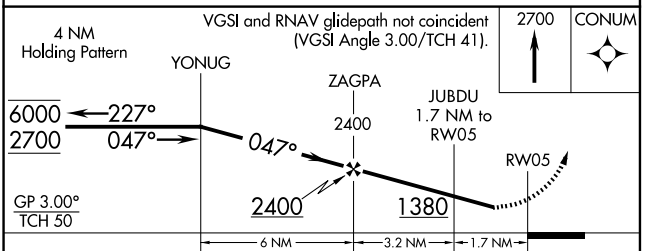


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1076-1 | | 279 (300-1) | |
| LNAV/VNAV DA | 1196-1⅛ | | 399 (400-1⅛) | |
| LNAV MDA | 1240-1 | 443 (500-1) | 1240-1¾ | 443 (500-1¾) |
| CIRCLING | 1240-1<br>440 (500-1) | 1260-1<br>460 (500-1) | 1440-1¾<br>640 (700-1¾) | 1520-2¼<br>720 (800-2¼) |

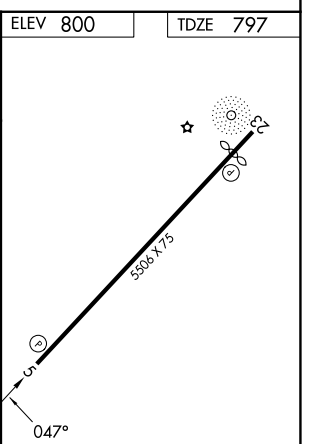


REIL Rwys 5 and 23 L
MIRL Rwy 5-23 L



EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026