BUCKEYE FOUR DEPARTURE (BXK4.BXK) 25JUN15

PHOENIX, ARIZONA
PHOENIX SKY HARBOR INTL (PHX)

**TOP ALTITUDE: 8000**

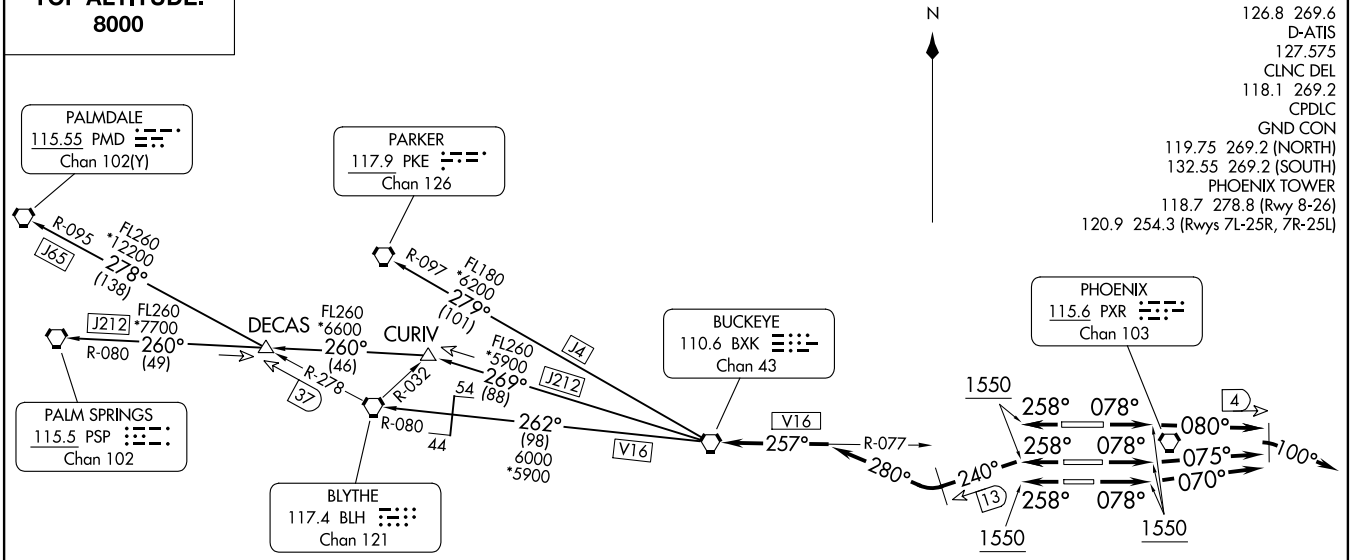


TAKEOFF MINIMUMS

Rwys 7L/7R/8: Standard with minimum climb of 300′ per NM to 8000.
Rwys 25L/25R/26: Standard with minimum climb of 350′ per NM to 8000.

NOTE: Restricted to turbojet and turboprop aircraft only.
NOTE: RADAR and DME required.
NOTE: Aircraft requesting FL 220 and below must file BLYTHE Transition.
NOTE: Turbojets landing LAX, file PARKER Transition.
NOTE: Aircraft landing other than LAX and turboprops landing at LAX:
Requesting FL240 and above, file PALMDALE or PALM SPRINGS Transition.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

BUCKEYE FOUR DEPARTURE (BXK4.BXK) 26246

AL-322 (FAA)

PHOENIX, ARIZONA
PHOENIX SKY HARBOR INTL (PHX)