WAAS	APP CRS	Rwy Ldg	10300
CH 40022	258°	TDZE	1134
W25A		Apt Elev	1135

RNAV (GPS) Y RWY 25R

PHOENIX SKY HARBOR INTL (PHX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP- 0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH: Climb to 5000 direct YECXY and via 260° track to BXK VORTAC and hold.

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON
127.575	128.65 353.9	118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)

MISSED APCH FIX

BUCKEYE BXK

084°

264°

5 NM

Procedure NA for arrivals at ZERLO via V190 northeast bound.

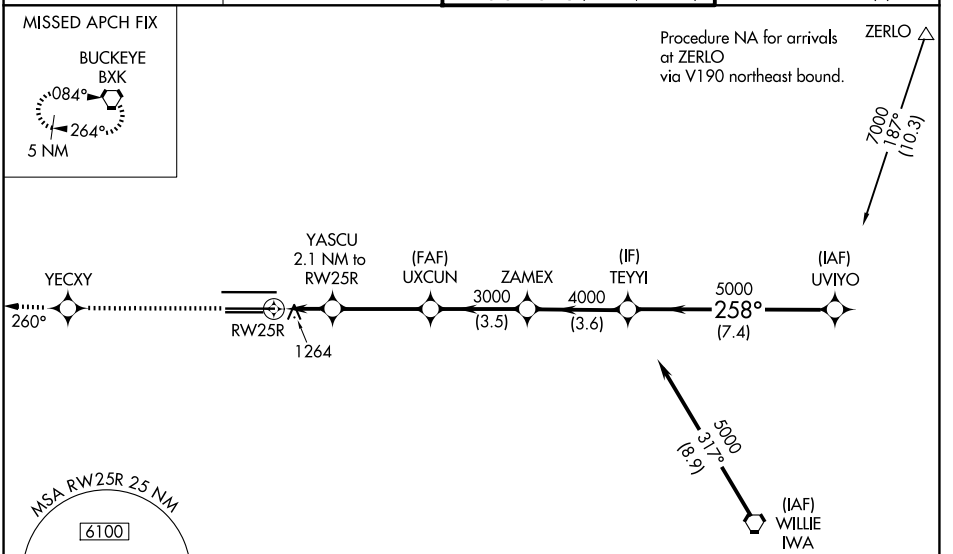



ELEV 1135 D TDZE 1134

5000	YECXY	tr 260°	BXK

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

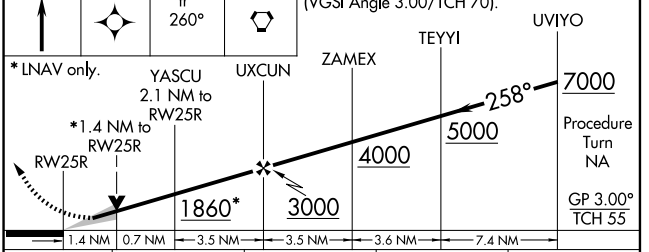



CATEGORY	A	B	C	D
LPV DA	1439-1 305 (400-1)			
LNAV/VNAV DA	1580-1½ 446 (500-1½)			
LNAV MDA	1640-1 506 (600-1)		1640-1½ 506 (600-1½)	
CIRCLING	1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)	2560-3 1425 (1500-3)

HIRL Rwys 8-26, 7L-25R and 7R-25L
REIL Rwy 26

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026