WAAS	APP CRS	Rwy Ldg	6503
CH 53328	006°	TDZE	346
W01A		Apt Elev	346

RNAV (GPS) RWY 1
EVERETT-STEWART RGNL (UCY)


NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase LNAV/VNAV all Cats visibility to 1⅛ SM, LNAV Cat C/D visibility to 1⅛ SM, and Circling Cat D visibility to 2½ SM. For inoperative ALS, increase LNAV/VNAV and LNAV all Cats visibility to 1 SM. For inoperative ALS when using Dyersburg altimeter setting, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1¼ SM, and LNAV Cat D visibility to 1⅜ SM. Inoperative table does not apply to LPV all Cats and LNAV Cats C/D.


ODALS

MISSED APPROACH: Climb to 2900 direct LOYIG and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
135.325	133.65 292.15	122.7 (CTAF)


MISSED APCH FIX



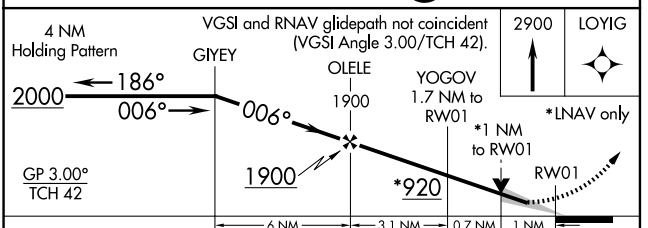

CATEGORY	A	B	C	D
LPV DA	546-¾ 200 (200-¾)			
LNAV/VNAV DA	640-⅞ 294 (300-⅞)			
LNAV MDA	720-¾ 374 (400-¾)		720-1 374 (400-1)	
CIRCLING	760-1 414 (500-1)	800-1 454 (500-1)	820-1½ 474 (500-1½)	1020-2¼ 674 (700-2¼)

ELEV 346 TDZE 346

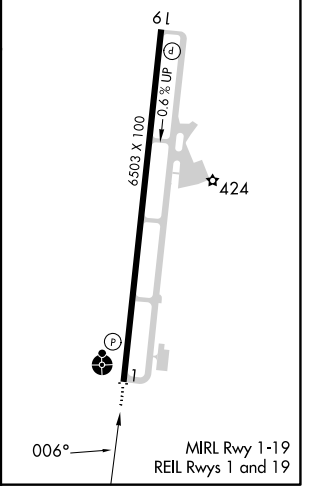

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026