RNAV (RNP) Z RWY 35R

DENVER INTL (DEN)

APP CRS	Rwy Ldg	12000
353°	TDZE	5370
	Apt Elev	5434

RNP AR APCH - GPS. Authorization required. From MSIMS: RF.

For uncompensated Baro-VNAV systems, procedure NA below -26°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4500. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 10000 direct EVAFA and on track 046° to YIMZO and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	132.35 239.275	121.35 379.175 (W) 121.85 377.1 (E)

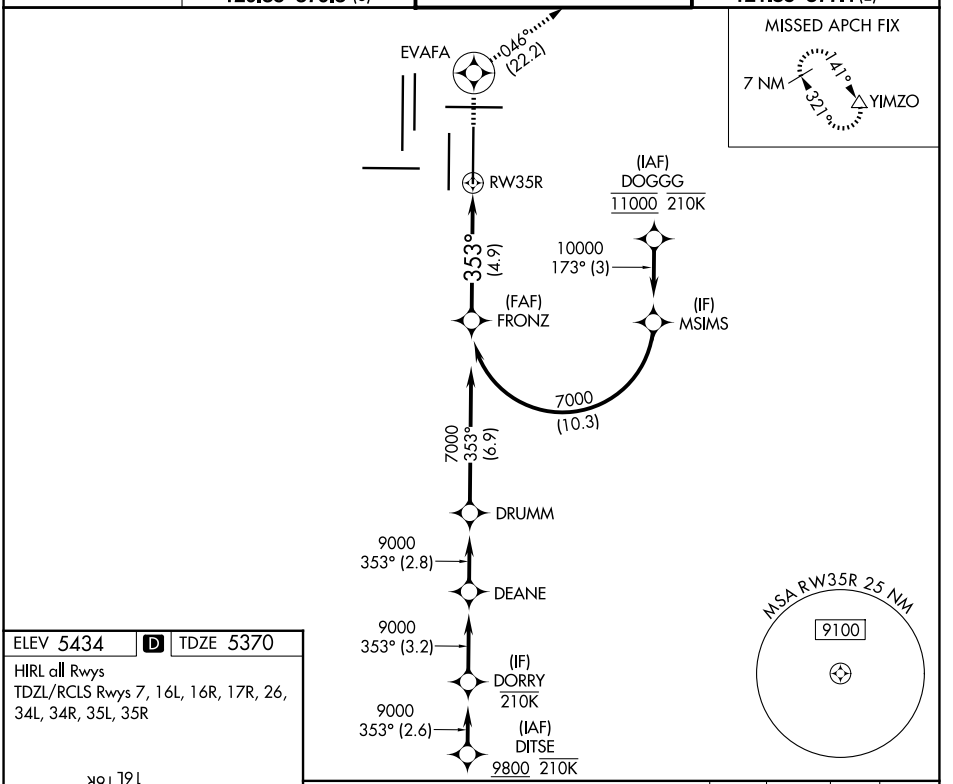

ELEV 5434 D TDZE 5370

HIRL all Rwys

TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

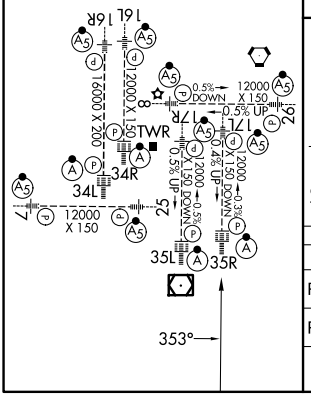

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

10000	EVAFA	tr 046°	YIMZO

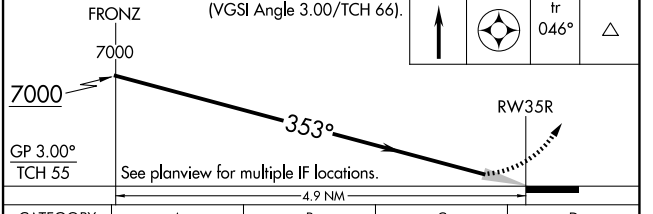

CATEGORY	A	B	C	D
RNP 0.10 DA	5631/24 261 (200-½)			
RNP 0.30 DA	5702/26 332 (300-½)			

AUTHORIZATION REQUIRED

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026