WAAS	APP CRS	Rwy Ldg	12000
CH 93529	173°	TDZE	5392
W17B		Apt Elev	5434

RNAV (GPS) Y RWY 17R

DENVER INTL (DEN)

RNP APCH - GPS.

T LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

MALSR (A5)

MISSED APPROACH: Climb to 11000 direct WUTVO and track 156° to FQF VORTAC and track 200° to HOHUM and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	124.3 322.45	121.35 379.175 (W) 121.85 377.1 (E)

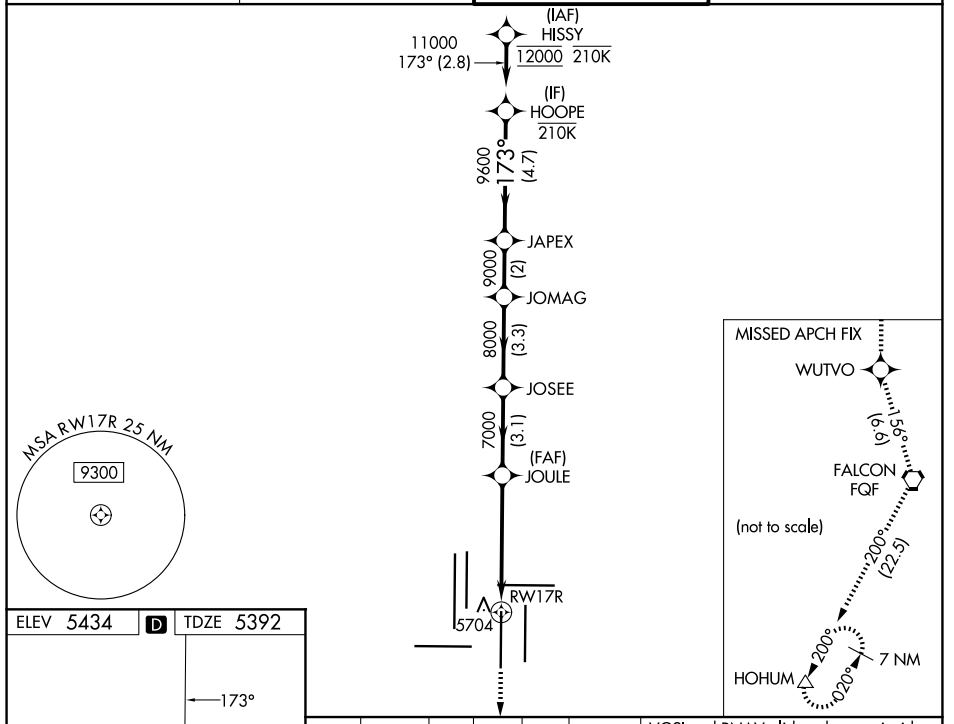

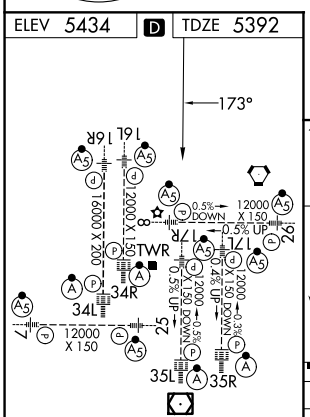

HIRL all Rwys
TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

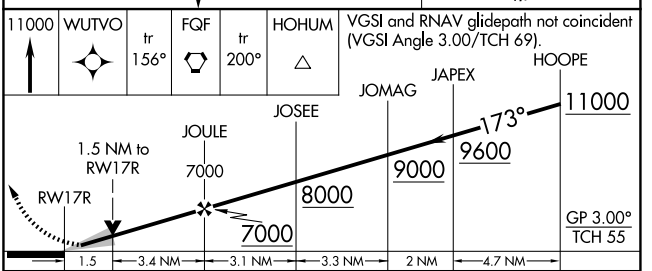

CATEGORY	A	B	C	D
LPV DA	5592/18 200 (200-½)			
LNAV/VNAV DA	5857/50 465 (500-1)			
LNAV MDA	5940/24 548 (600-½)		5940/60 548 (600-1¼)	

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026