RNAV (GPS) Y RWY 35R

DENVER INTL (DEN)

WAAS CH 45719 W35B	APP CRS 353°	Rwy Ldg 12000 TDZE 5370 Apt Elev 5434

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 10000 direct EVAFA and on track 046° to YIMZO and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	132.35 239.275	121.35 379.175 (W) 121.85 377.1 (E)

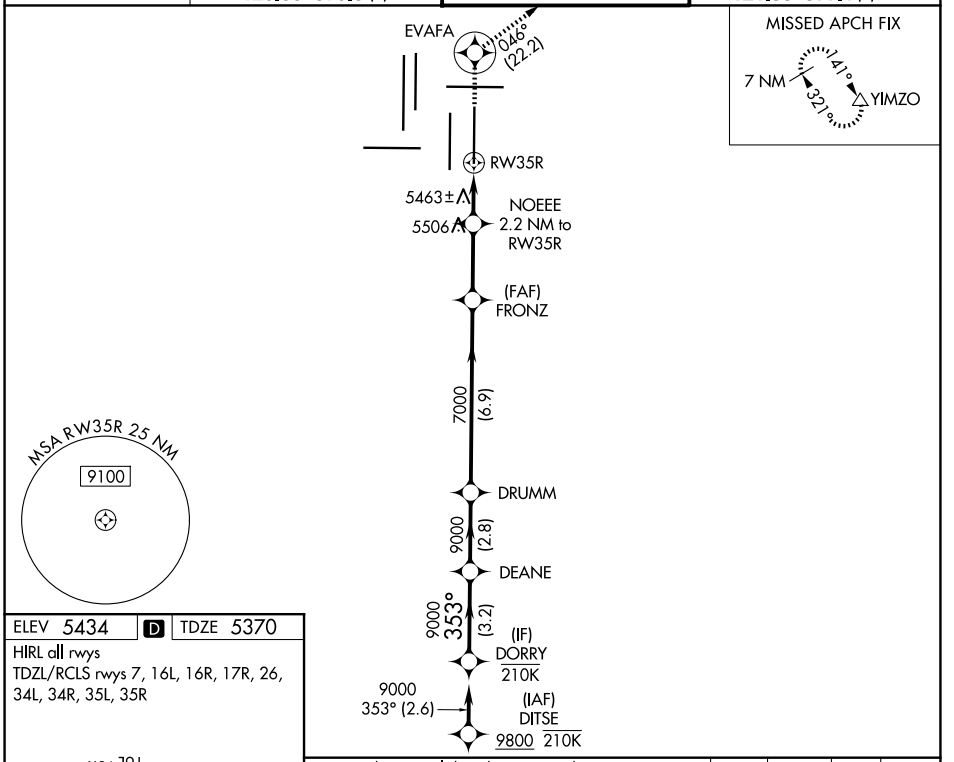

ELEV 5434 D TDZE 5370

HIRL all rwys

TDZL/RCLS rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

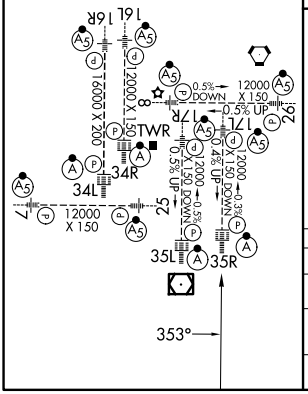

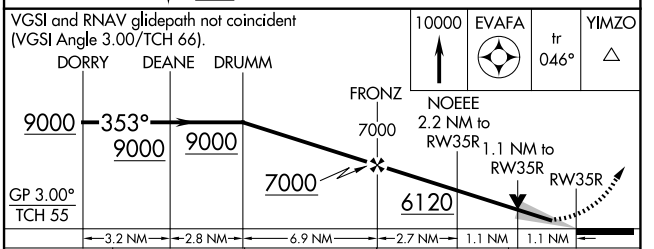

CATEGORY	A	B	C	D
LPV DA	5570/18 200 (200-½)			
LNAV/VNAV DA	5620/24 250 (200-½)			
LNAV MDA	5800/24 430 (400-½)			

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026