RNAV (GPS) Y RWY 7

DENVER INTL (DEN)

WAAS CH 87128 W07A	APP CRS 082°	Rwy Ldg 12000 TDZE 5352 Apt Elev 5434

RNP APCH - GPS.

T Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cat C/D visibility to RVR 5500. Use of FD or AP required during simultaneous operations.

MALSR (A5)

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct CIDMU and on track 081° to LIMEX and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	128.75 273.55	121.35 379.175 (W) 121.85 377.1 (E)

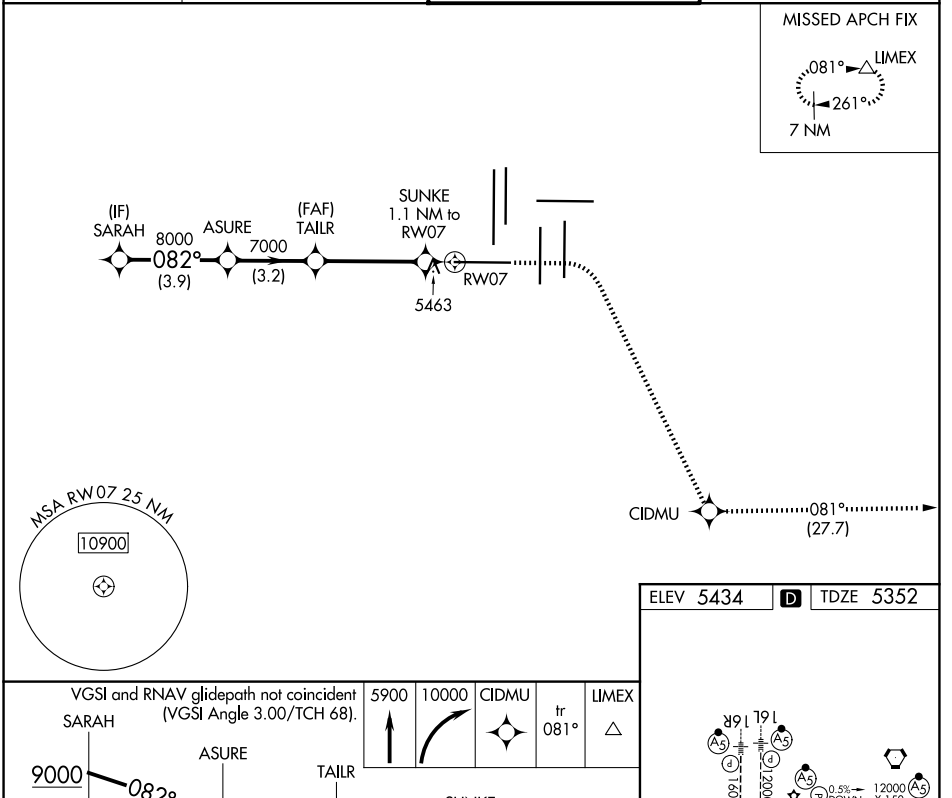

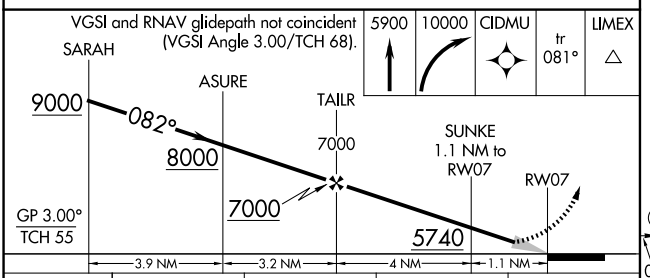

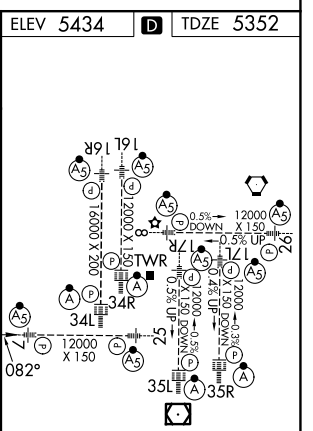

CATEGORY	A	B	C	D
LPV DA	5552/18 200 (200-½)			
LNAV/VNAV DA	5626/24 274 (200-½)			
LNAV MDA	5720/24 368 (300-½)		5720/35 368 (300-⅝)	

HIRL all Rwys
TDZL/RCLS Rwys 7, 16L, 16R, 26, 34L, 34R, 35L, 35R

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026