RNAV (GPS) Y RWY 8

DENVER INTL (DEN)

WAAS	APP CRS	Rwy Ldg	12000
CH 82228	082°	TDZE	5354
W08A		Apt Elev	5434

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 47°C (117°F). Simultaneous approach authorized with Rwy 7. DME/DME RNP- 0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 10000 direct KVERN and on track 041° to WITNE and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	132.35 239.275	121.35 379.175 (W) 121.85 377.1 (E)

MISSED APCH FIX



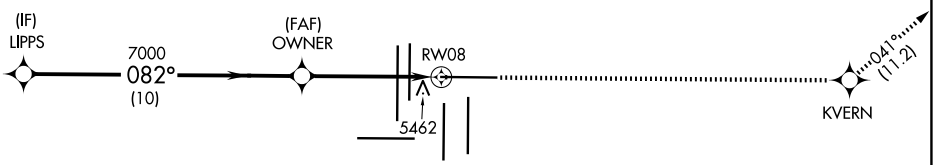



RADAR REQUIRED

ELEV 5434 | D | TDZE 5354



HIRL all Rwys

TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

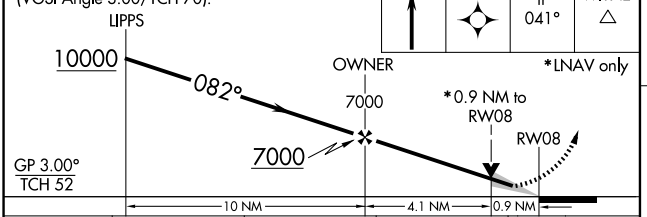

CATEGORY	A	B	C	D
LPV DA #	5554/24 200 (200-½)			
LNAV/VNAV DA	5833/60 479 (400-1¼)			
LNAV MDA	5720/24 366 (300-½)		5720/35 366 (300-⅝)	

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026