ZIMMR FOUR DEPARTURE (RNAV)

(ZIMMR4.ZIMMR) 19MAR26

DENVER, COLORADO

DENVER INTL (DEN)

RNAV 1 - DME/DME/IRU or GPS.

TAKEOFF Rwy 8 RADAR required.
TAKEOFF Rwys 16L/R, 17L/R, 25, 34L/R, 35L/R RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE: FL230

DENVER DEP CON
126.1 360.75
D-ATIS DEP
134.025
CLNC DEL
118.75
CPDLC

NOTE: Turbojets only.
NOTE: Accelerate to 250K upon reaching 10000. If slower speed is required to meet crossing restrictions, advise CLNC DEL prior to taxi.

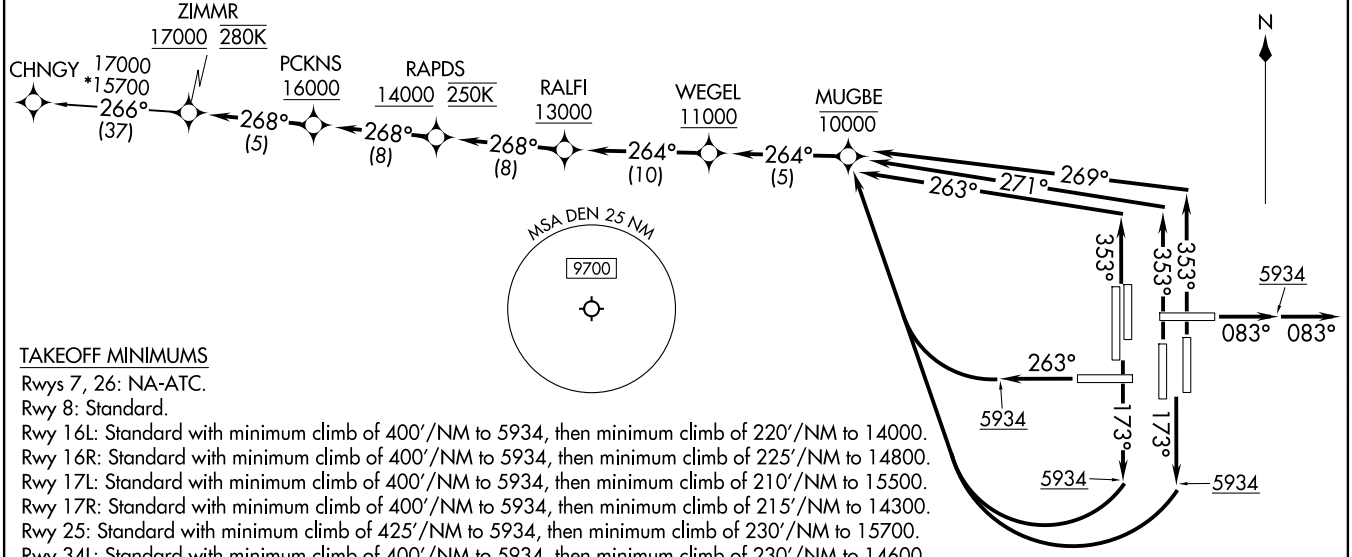

TAKEOFF MINIMUMS

Rwys 7, 26: NA-ATC.
Rwy 8: Standard.
Rwy 16L: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 220'/NM to 14000.
Rwy 16R: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 225'/NM to 14800.
Rwy 17L: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 210'/NM to 15500.
Rwy 17R: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 215'/NM to 14300.
Rwy 25: Standard with minimum climb of 425'/NM to 5934, then minimum climb of 230'/NM to 15700.
Rwy 34L: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 230'/NM to 14600.
Rwy 34R: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 220'/NM to 15700.
Rwy 35L: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 215'/NM to 14000.
Rwy 35R: Standard with minimum climb of 400'/NM to 5934, then minimum climb of 210'/NM to 14500.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

ZIMMR FOUR DEPARTURE (RNAV)

(ZIMMR4.ZIMMR) 26078

AL-9077 (FAA)

DENVER INTL (DEN)
DENVER, COLORADO