WAAS	APP CRS	Rwy Ldg	5001
CH 65925	179°	TDZE	275
W18A		Apt Elev	279

RNAV (GPS) RWY 18


WALNUT RIDGE RGNL (ARG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 529 feet, LNAV/VNAV DA to 579 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.


ODALS

MISSED APPROACH: Climb to 3100 direct GUBFO and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
126.525	120.075 289.4	122.8 (CTAF) L

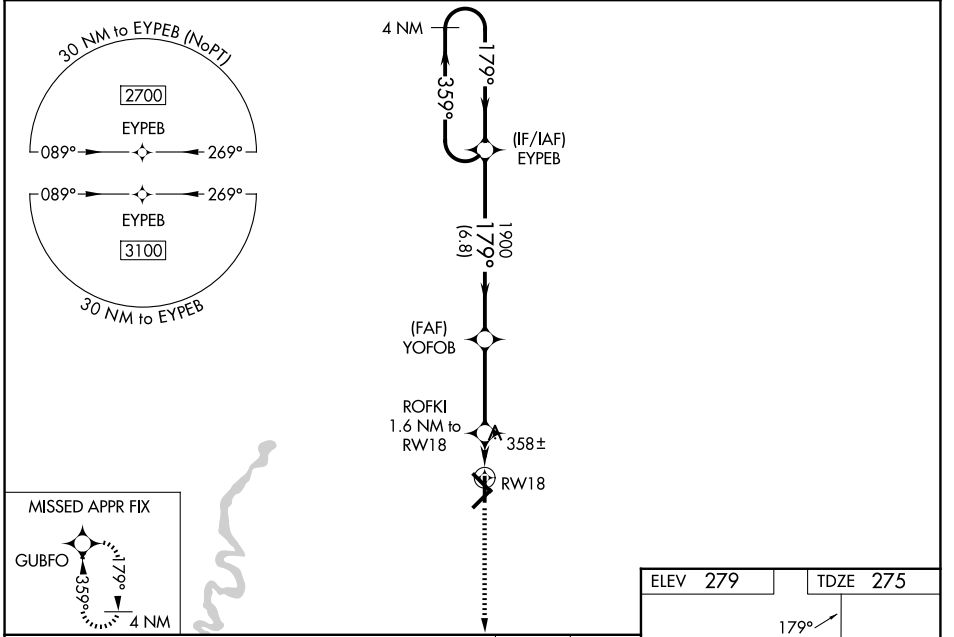

CATEGORY	A	B	C	D
LPV DA	475-¾ 200 (200-¾)			
LNAV/VNAV DA	525-¾ 250 (300-¾)			
LNAV MDA	620-¾ 345 (400-¾)		620-⅞ 345 (400-⅞)	
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)

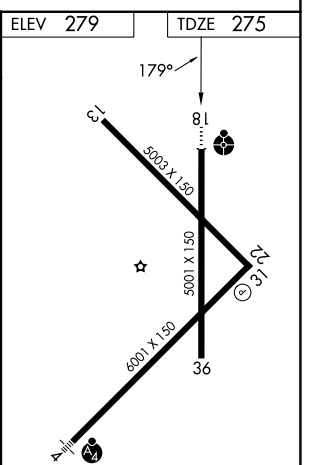

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026