RNAV (GPS) RWY 22


WALNUT RIDGE RGNL (ARG)

WAAS	APP CRS	Rwy Ldg	6001
CH 82125	224°	TDZE	274
W22A		Apt Elev	279


Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ⅛ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2700 direct XIHAM and hold.


AWOS-3PT	MEMPHIS CENTER	UNICOM
126.525	120.075 289.4	122.8 (CTAF) L

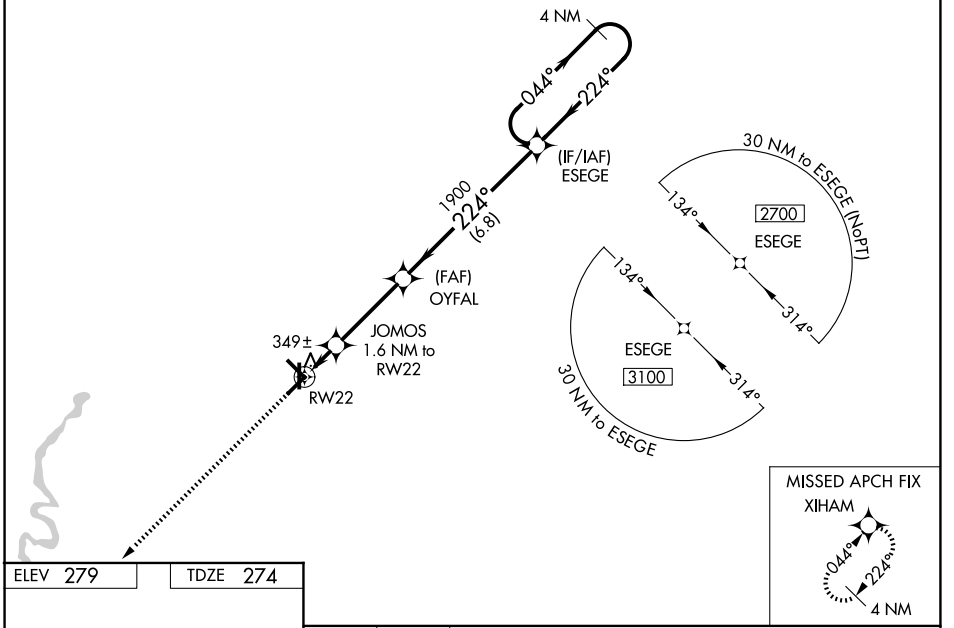

ELEV 279 TDZE 274

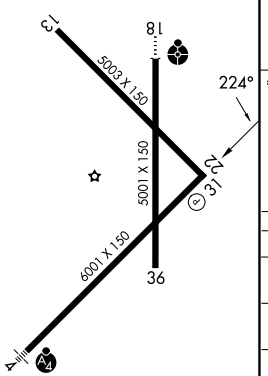

REIL Rwy 18 L
MIRL Rwy 4-22, 18-36 L

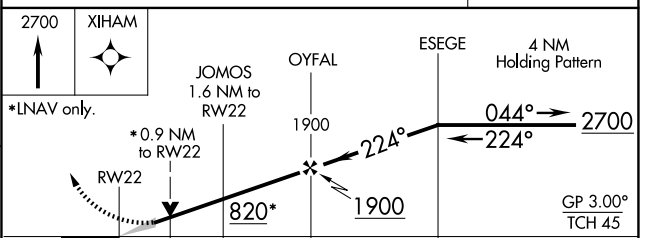

CATEGORY	A	B	C	D
LPV DA	524-1 250 (300-1)			
LNAV/VNAV DA	524-1 250 (300-1)			
LNAV MDA	600-1 326 (400-1)			
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026