RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (ARG)

WAAS	APP CRS	Rwy Ldg	6001
CH 77825	044°	TDZE	279
W04A		Apt Elev	279


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.

MALSF


MISSED APPROACH: Climb to 2700 direct ESEGE and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
126.525	120.075 289.4	122.8 (CTAF) L

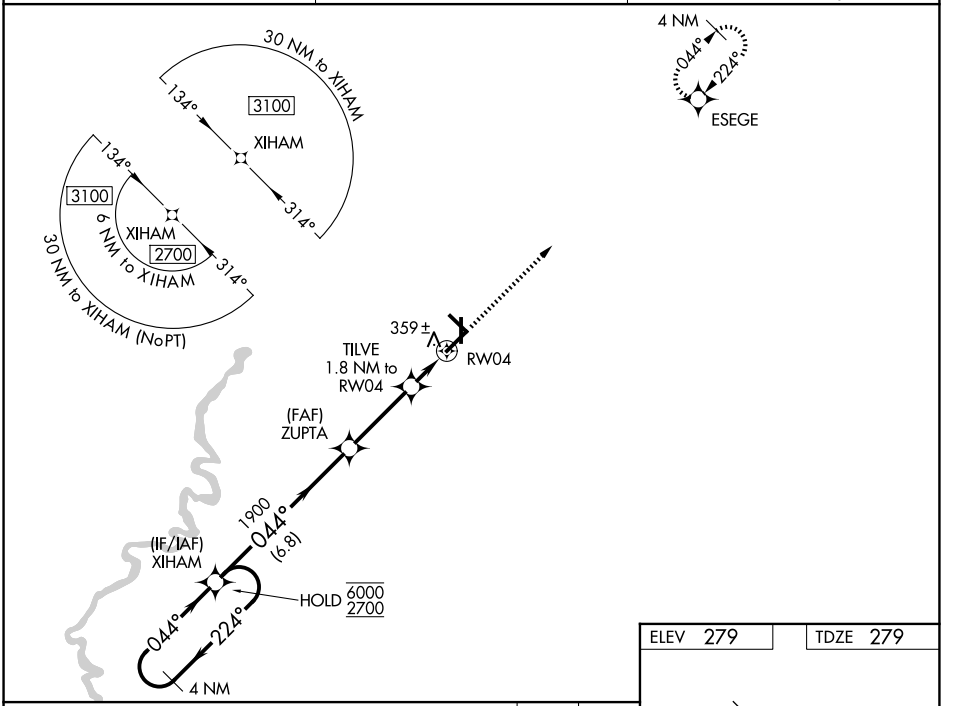

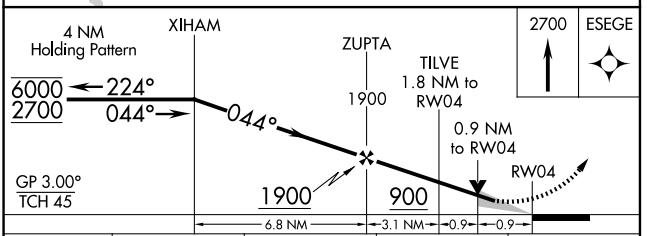

CATEGORY	A	B	C	D
LPV DA	529- ¾	250 (300- ¾)		
LNAV/VNAV DA	529- ¾	250 (300- ¾)		
LNAV MDA	620- ¾	341 (400- ¾)		
CIRCLING	840-1 561 (600-1)		840-1½ 561 (600-1½)	1000-2¼ 721 (800-2¼)

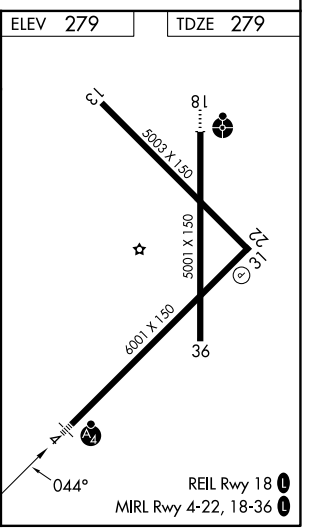

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026