RNAV (GPS) RWY 5

PAGO PAGO INTL (PPG) (NSTU)

APP CRS	Rwy Ldg	8200
047°	TDZE	32
	Apt Elev	32


RNP APCH.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 22°C or above 54°C. When local altimeter setting not received, procedure NA. Circling NA northwest of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats C/D visibility to 2 SM.


MALSR

MISSED APPROACH: (Maintain 185 K max until 760) Climb to 760 then climbing right turn to 4000 direct DRAWN and hold.

FALEOLO APP CON	CTAF	
118.1 6.553 (HF)	122.9	118.3 L

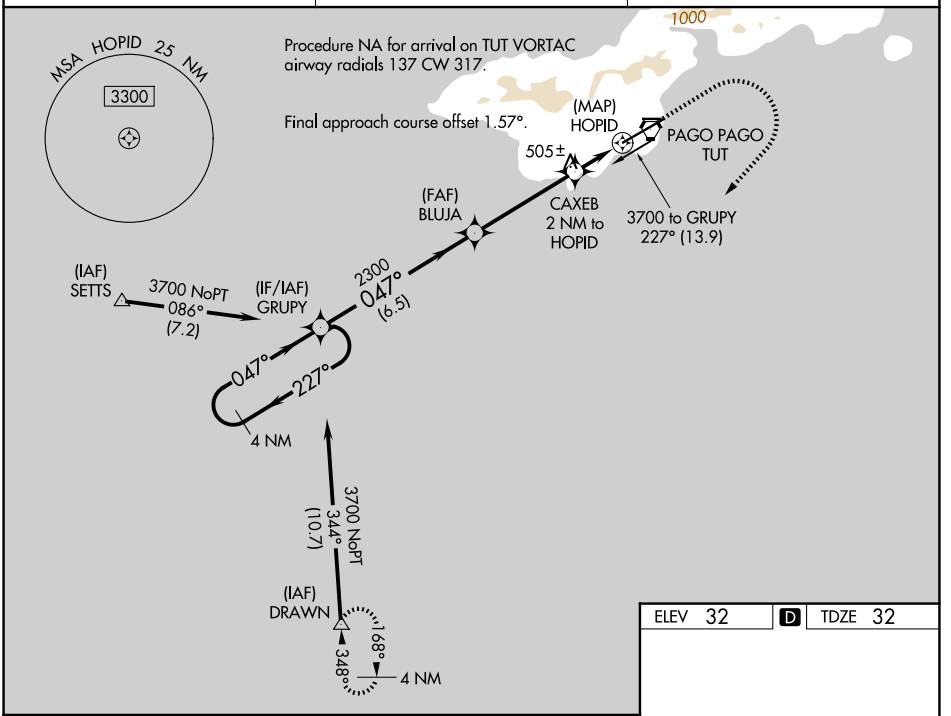

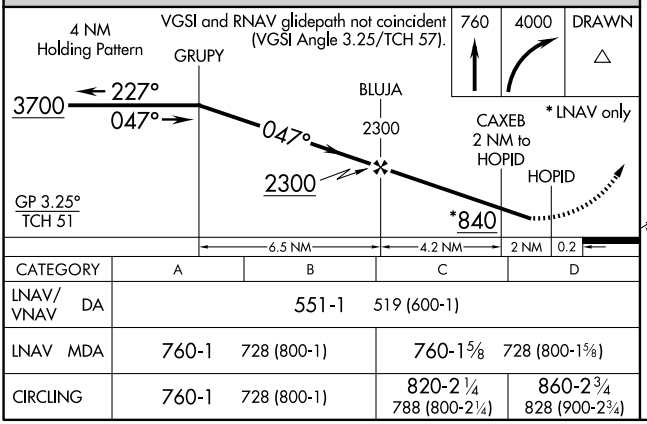

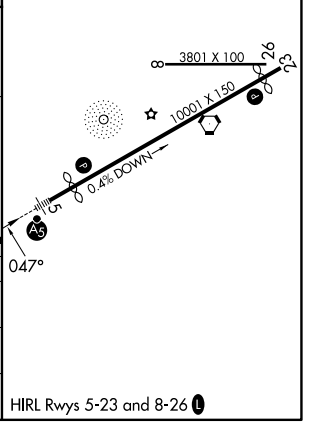

CATEGORY	A	B	C	D
LNAV/VNAV DA	551-1	519 (600-1)		
LNAV MDA	760-1	728 (800-1)	760-1⅝	728 (800-1⅝)
CIRCLING	760-1	728 (800-1)	820-2¼ 788 (800-2¼)	860-2¾ 828 (900-2¾)

HIRL Rwys 5-23 and 8-26 L

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026