RNAV (GPS) Y RWY 22L

NEW YORK / JOHN F. KENNEDY INTL (JFK)

WAAS	APP CRS	Rwy Idg	8400
CH 97318	225°	TDZE	13
W22A		Apt Elev	13

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (8°F) or above 49°C (120°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 3000 direct FOLER and via 189° track to CHANT and hold.

ATIS			NEW YORK APP CON		KENNEDY TOWER			GND CON		CLNC DEL	
ARR	(NE)	(SW)	127.4	269.0	Rwys 4R/22L and 13L/31R	119.1	281.55	121.9	348.6	135.05	348.6
128.725	117.7	115.4			Rwys 4L/22R and 13R/31L	123.9	281.55				
DEP 115.1											

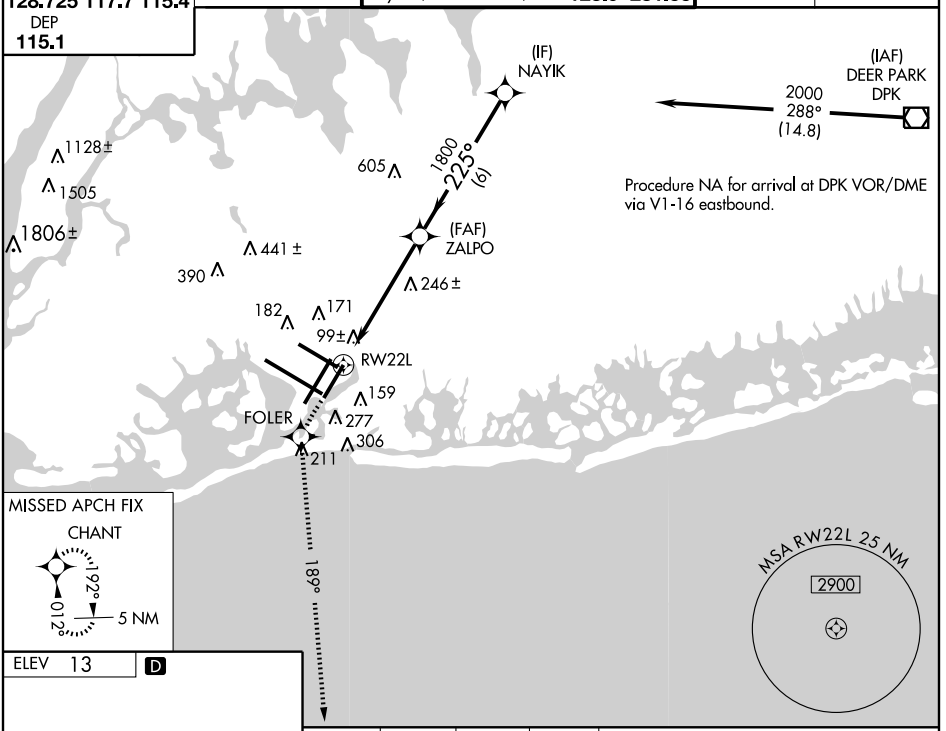

ELEV 13 D



TDZ/CL Rwys 4R, 13L, 31R and 22L
REIL Rwy 4L
HIRL Rwys 4L-22R, 4R-22L, 13R-31L, and 13L-31R

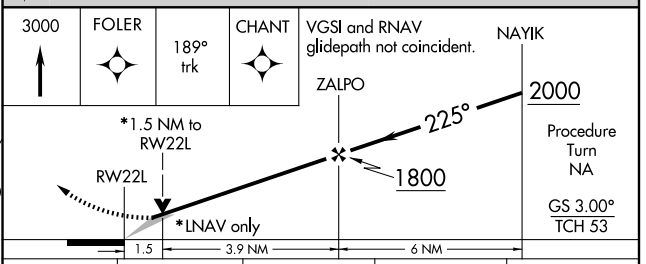

CATEGORY	A	B	C	D
LPV DA	270/24 257 (300-½)			
LNAV/VNAV DA	420/50 407 (500-1)			
LNAV MDA	560/24 547 (600-½)		560/50 547 (600-1)	560/60 547 (600-1¼)
CIRCLING	640-1 627 (700-1)		640-1¾ 627 (700-1¾)	640-2 627 (700-2)

NE-2, 11 FEB 2010 to 11 MAR 2010
NE-2, 11 FEB 2010 to 11 MAR 2010