

WAAS CH 97318 W22A	APP CRS 224°	Rwy Idg 8400 TDZE 12 Apt Elev 13
--	------------------------	---

RNAV (GPS) Y RWY 22L

JOHN F KENNEDY INTL (JFK)

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALS F-2

MISSED APPROACH: Climb to 3000 direct FOLER and on track 188° to CHANT and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)			NEW YORK APP CON		KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6	

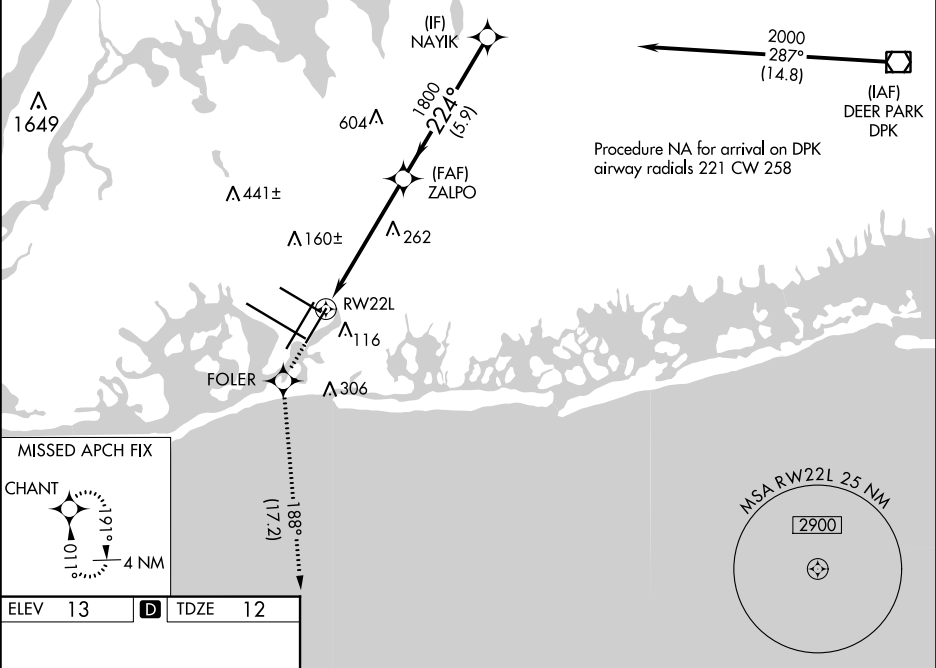


Diagram of runway layout showing RW22L, RW22R, RW4L, RW4R, RW13L, RW13R, and RW31L. Includes tower (TWR 338) and various navigation aids like VORTAC and VORT.

3000

FOLER

tr 188°

CHANT

*LNAV only.

*1.5 NM to RW22L

RW22L

ZALPO

1800

224°

2000

GP 3.00°

TCH 53

1.5

4 NM

5.9 NM

CATEGORY	A	B	C	D
LPV DA	269/18		257 (300-½)	
LNAV/VNAV DA	419/50		407 (500-1)	
LNAV MDA	560/24	548 (600-½)	560/60	548 (600-1¼)
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)

RLS Rwy's 13L and 13R

HIRL all Rwy's

TDZ/CL Rwy's 4L, 4R, 13L, 22L and 31R