

WAAS CH 40019 W22B	APP CRS 225°	Rwy Idg TDZE Apt Elev	7795 12 13
--	------------------------	-----------------------------	---------------------------------------



RNAV (GPS) RWY 22R


JOHN F KENNEDY INTL (JFK)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH:
Climb to 4000 direct
PIDTO and on track 237°
to COL VOR/DME and hold.

ATIS (ARR-NE) (ARR-SW)			NEW YORK APP CON		KENNEDY TOWER			GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.12	269.0	Rwys 4R/22L and 13L/31R	119.1	281.55	121.9	135.05	
					Rwys 4L/22R and 13R/31L	123.9	281.55	348.6	348.6	

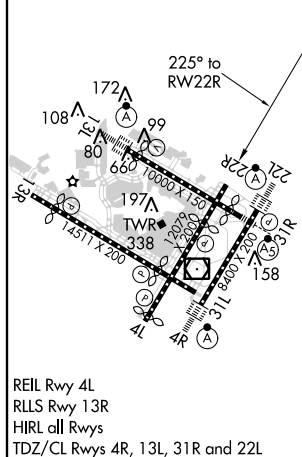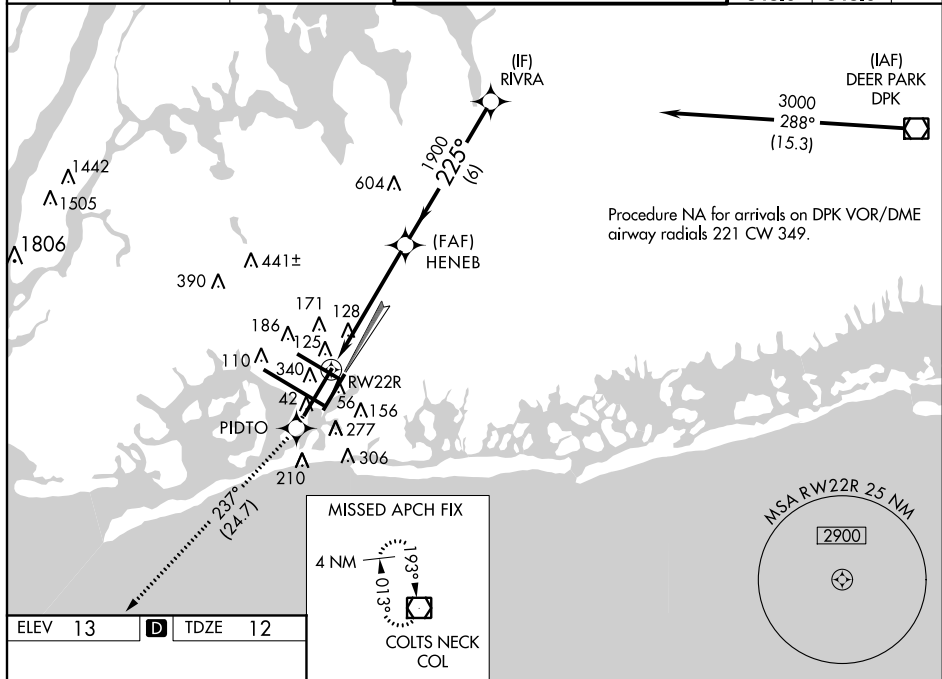

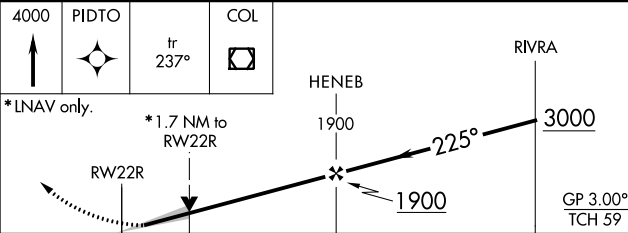4000 ↑		PIDTO ✦		COL tr 237° ◻					
*LNAV only.		*1.7 NM to RW22R							
CATEGORY		A		B		C		D	
LPV DA		269/40		257 (300-¾)					
LNAV/VNAV DA		501-1½		489 (500-1%)					
LNAV MDA		600/50 588 (600-1)		600-1¾ 588 (600-1¾)					
C CIRCLING		640-1 627 (700-1)		640-1¾ 627 (700-1¾)		660-2 647 (700-2)			

RNAV (GPS) RWY 22R