

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>40019</b><br><b>W22B</b> | APP CRS<br><b>225°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7795</b><br><b>12</b><br><b>13</b> |
|--|------------------------|-----------------------------|---------------------------------------|


## RNAV (GPS) RWY 22R

JOHN F KENNEDY INTL (JFK)


**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 22L, ILS Rwy 22L (CAT II), ILS Rwy 22L (CAT III), RNAV (GPS) Y Rwy 22L. RNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

**MISSED APPROACH:**  
Climb to 4000 direct  
PIDTO and on track 237°  
to COL VOR/DME and hold.

| ATIS<br>(ARR-NE) (ARR-SW) |       |       | NEW YORK APP CON |       | KENNEDY TOWER           |       |        | GND CON | CLNC DEL | CPDLC |
|---------------------------|-------|-------|------------------|-------|-------------------------|-------|--------|---------|----------|-------|
| 128.725                   | 117.7 | 115.4 | 128.12           | 269.0 | Rwys 4R/22L and 13L/31R | 119.1 | 281.55 | 121.9   | 135.05   |       |
|                           |       |       |                  |       | Rwys 4L/22R and 13R/31L | 123.9 | 281.55 | 348.6   | 348.6    |       |

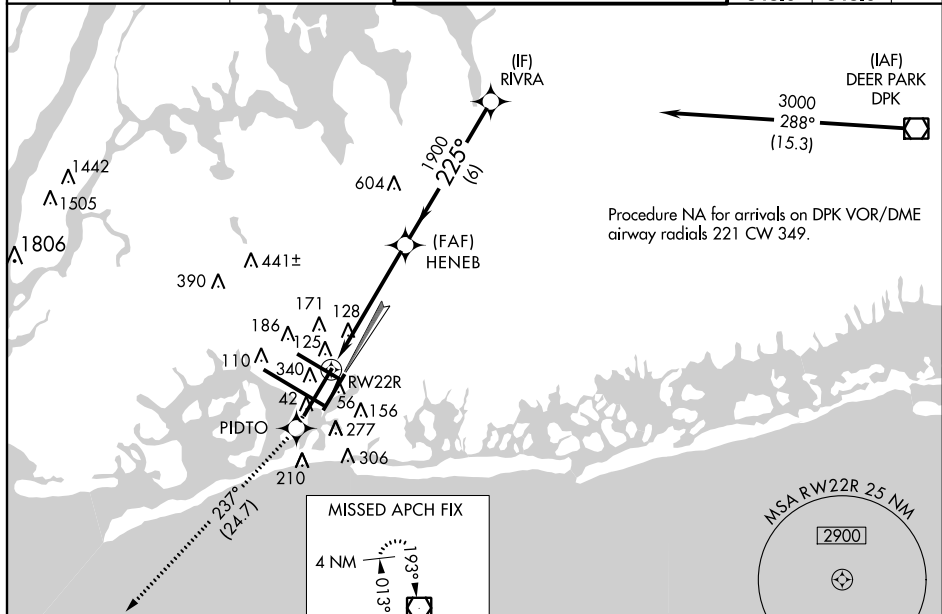

|         |          |         |
|---------|----------|---------|
| ELEV 13 | <b>D</b> | TDZE 12 |
|---------|----------|---------|

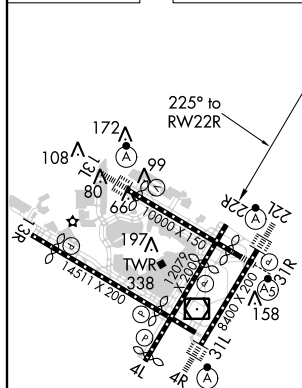

REIL Rwy 4L  
RLLS Rwy 13R  
HIRL all Rwys  
TDZ/CL Rwys 4R, 13L, 31R and 22L

|                   |            |                     |                     |   |                   |  |
|-------------------|------------|---------------------|---------------------|---|-------------------|--|
| 4000<br>↑         | PIDTO<br>✦ | tr<br>237°<br>☐     |                     |   |                   |  |
| * LNAV only.      |            | * 1.7 NM to RW22R   |                     |   |                   |  |
| CATEGORY          |            | A                   | B                   | C | D                 |  |
| LPV               | DA         | 269/40 257 (300-¾)  |                     |   |                   |  |
| LNAV/<br>VNAV     | DA         | 501-1½ 489 (500-1½) |                     |   |                   |  |
| LNAV MDA          |            | 600/50 588 (600-1)  | 600-1¾ 588 (600-1¾) |   |                   |  |
| <b>C</b> CIRCLING |            | 640-1 627 (700-1)   | 640-1¾ 627 (700-1¾) |   | 660-2 647 (700-2) |  |

## RNAV (GPS) RWY 22R