

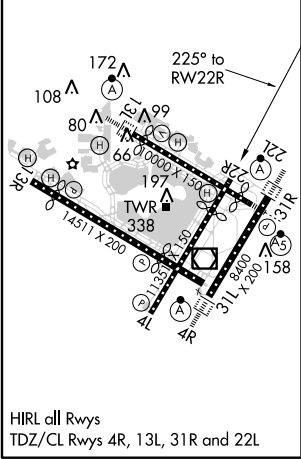
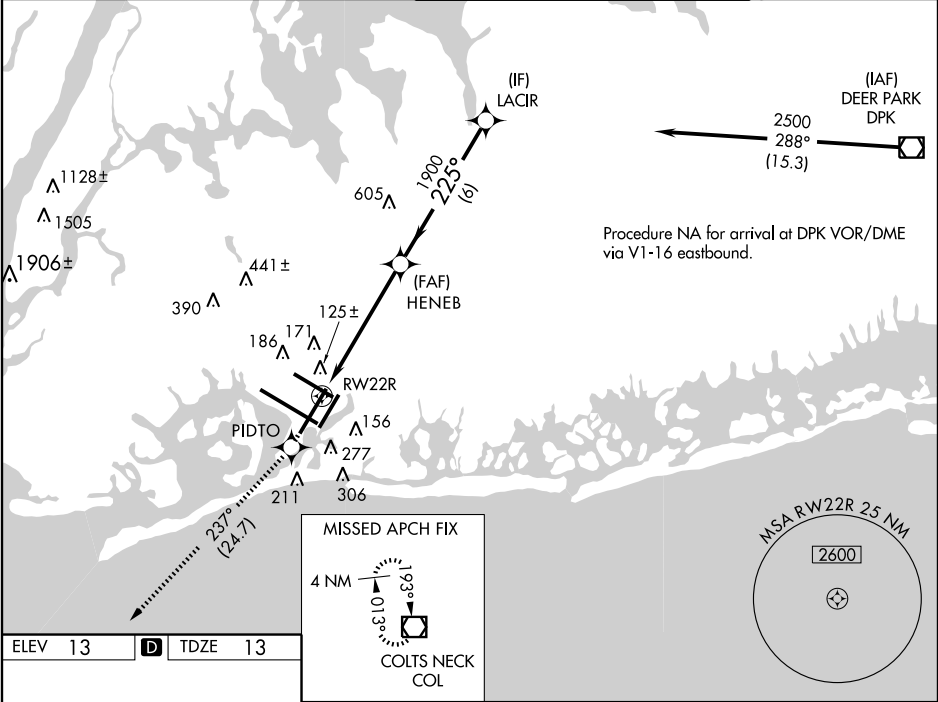
WAAS CH 40019	APP CRS 225°	Rwy ldg TDZE Apt Elev	8655 13 13
-------------------------	------------------------	-----------------------------	---------------------------------------




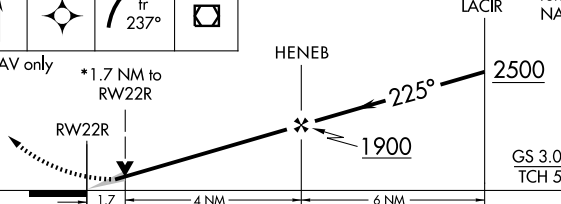
RNAV (GPS) RWY 22R
NEW YORK / JOHN F. KENNEDY INTL (JFK)

▼ DME/DME RNP -0.3 NA. Baro-VNAV NA below -15°C (5°F). Simultaneous approach authorized with ILS or LOC Rwy 22L, ILS Rwy 22L (CAT II), ILS Rwy 22L (CAT III), RNAV (GPS) Y Rwy 22L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 4000 direct PIDTO and right turn via 237° track to COL VOR/DME and hold.

ATIS (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	GND CON	CLNC DEL
128.725 117.7 115.4	127.4 269.0	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6



4000	PIDTO	COL	Procedure Turn NA	
				
				
*LNAV only *1.7 NM to RW22R				
RW22R HENEB LACIR 2500				
GS 3.00° TCH 59				
CATEGORY	A	B	C	D
LPV DA	270/40 257 (300-¾)			
LNAV/VNAV DA	480-1½ 467 (500-1½)			
LNAV MDA	600/50 587 (600-1)	600-1½ 587 (600-1½)		600-1¾ 587 (600-1¾)
CIRCLING	640-1½ 627 (700-1½)	640-1¾ 627 (700-1¾)		640-2 627 (700-2)