
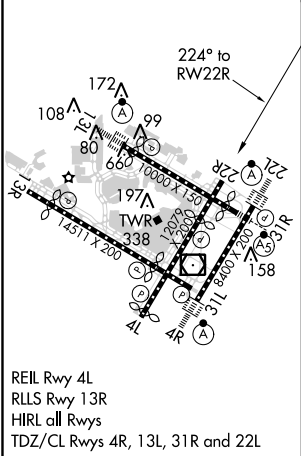


WAAS CH 40019 W22B	APP CRS 224°	Rwy Idg 7795 TDZE 13 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 22R

JOHN F KENNEDY INTL (JFK)

RNP APCH.			MISSED APPROACH: Climb to 4000 direct PIDTO and on track 236° to COL VOR/DME and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.					
D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW) 128.725 117.7 115.4	NEW YORK APP CON 128.125 269.0	KENNEDY TOWER Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	GND CON 121.9 348.6	CLNC DEL 135.05 348.6	CPDLC

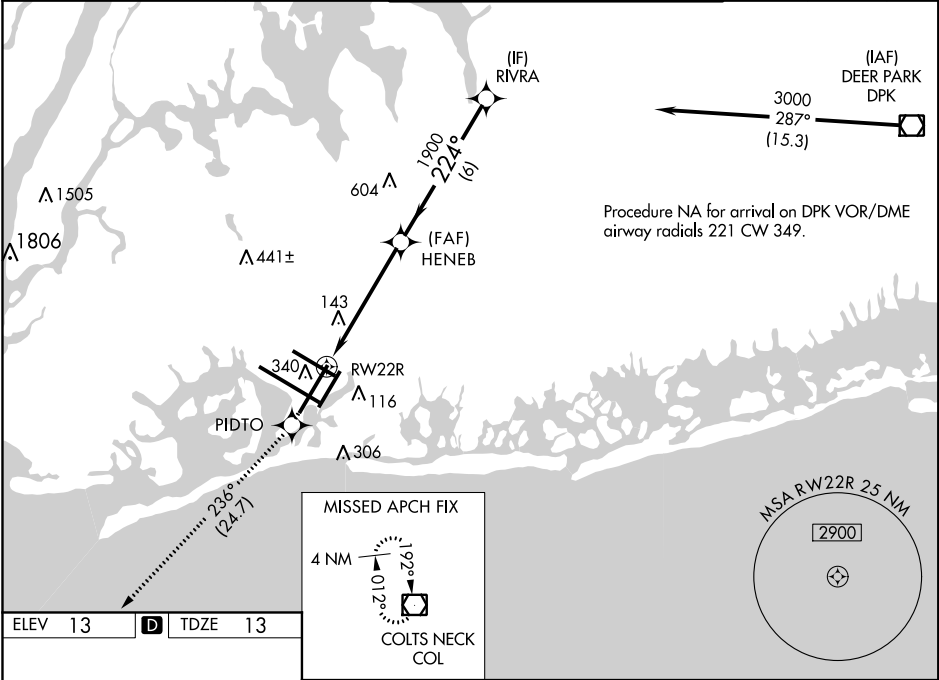

4000	PIDTO	COL	RIVRA	
↑	✧	tr 236°	✧	✧
*LNAV only.				
RW22R 1.7 NM to RW22R 4 NM 1900 224° 3000				
GP 3.00° TCH 59				
CATEGORY	A	B	C	D
LPV DA	269/40 256 (300-¾)			
LNAV/VNAV DA	501-1½ 488 (500-1%)			
LNAV MDA	600/50	587 (600-1)	600-1¾	587 (600-1¾)
CIRCLING	640-1	627 (700-1)	640-1¾	660-2
			627 (700-1¾)	647 (700-2)