

LOC/DME I-JOC	APP CRS	Rwy Idg	8655
109.5	222°	TDZE	13
Chan 32		Apt Elev	13

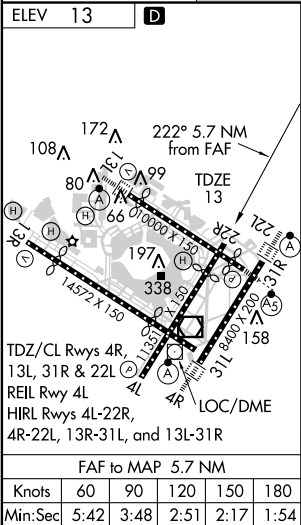
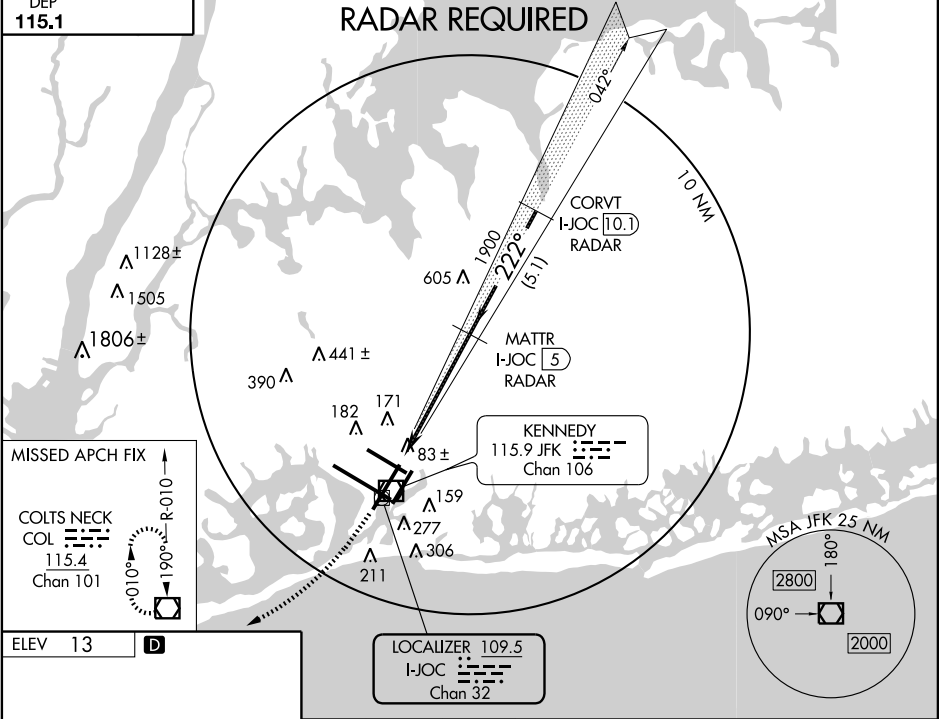
ILS RWY 22R




NEW YORK / JOHN F. KENNEDY INTL (JFK)

MISSED APPROACH: Climb to 700 then climbing right turn to 4000 direct COL VOR/DME and hold.

ATIS	NEW YORK APP CON	KENNEDY TOWER	GND CON	CLNC DEL
ARR (NE) (SW)		Rwys 4R/22L and 13L/31R		
128.725 117.7 115.4	127.4 269.0	119.1 281.55	121.9 348.6	135.05 348.6
DEP		Rwys 4L/22R and 13R/31L		
115.1		123.9 281.55		

RADAR REQUIRED



700	4000	COL				
		 115.4				
			MATR I-JOC (5) RADAR	CORVT I-JOC (10.1) RADAR		
			1900	222°	3000*	
			*1900 when authorized by ATC.			
			1900			GS 3.00° TCH 59
			5.7 NM	5.1 NM		
CATEGORY	A	B	C	D		
S-ILS 22R	263/40			250 (300-¾)		
S-LOC 22R	460/50	447 (500-1)	460/60 447 (500-1¼)	460-1½ 447 (500-1½)		
CIRCLING	640-1	627 (700-1)	640-1¾ 627 (700-1¾)	640-2 627 (700-2)		