WAAS CH 40019 W22B	APP CRS 224°	Rwy ldg 7795 TDZE 13 Apt Elev 13

RNAV (GPS) RWY 22R

JOHN F KENNEDY INTL (JFK)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH:
Climb to 4000 direct PIDTO and on track 236° to COL VOR/DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON		KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R 119.1	281.55	121.9	135.05	
					Rwys 4L/22R and 13R/31L 123.9	281.55	348.6	348.6	

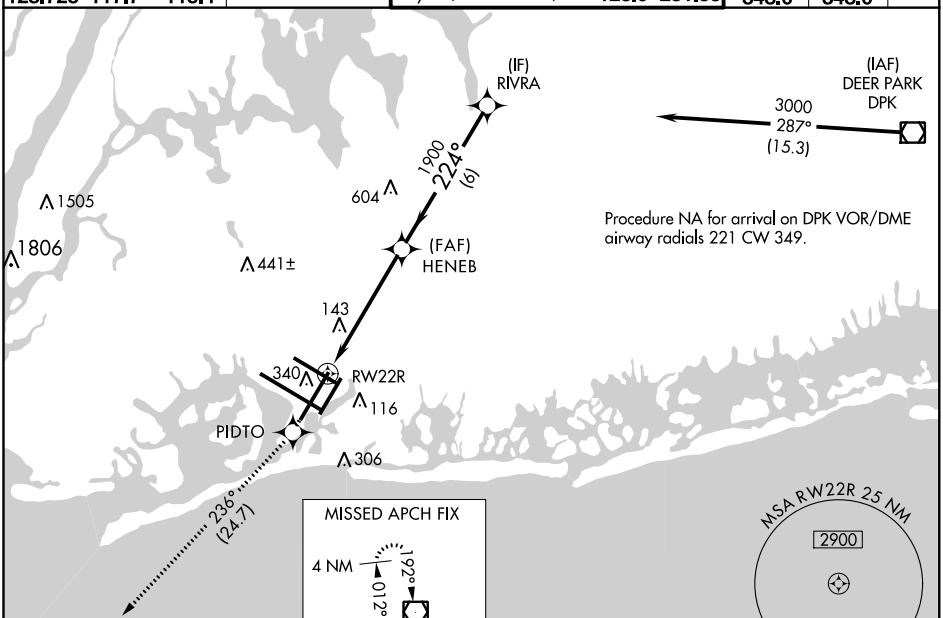

ELEV 13	D	TDZE 13



REIL Rwy 4L
RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4R, 13L, 22L and 31R

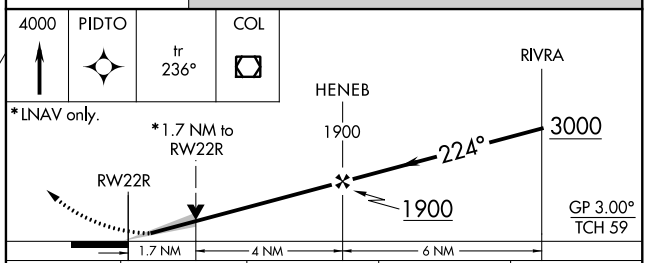

CATEGORY	A	B	C	D
LPV DA	269/40 256 (300-¾)			
LNAV/VNAV DA	501-1⅝ 488 (500-1⅝)			
LNAV MDA	600/50 587 (600-1)		600-1¾ 587 (600-1¾)	
C CIRCLING	640-1 627 (700-1)		640-1¾ 627 (700-1¾)	660-2 647 (700-2)

NE-2, 07 NOV 2019 to 05 DEC 2019

NE-2, 07 NOV 2019 to 05 DEC 2019