

WAAS CH 97318 W22A	APP CRS 224°	Rwy Idg 8400 TDZE 12 Apt Elev 13
--	------------------------	---

RNAV (GPS) Y RWY 22L

JOHN F KENNEDY INTL (JFK)

RNP APCH.


T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2




MISSED APPROACH: Climb to 3000 direct FOLER and on track 188° to CHANT and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6	

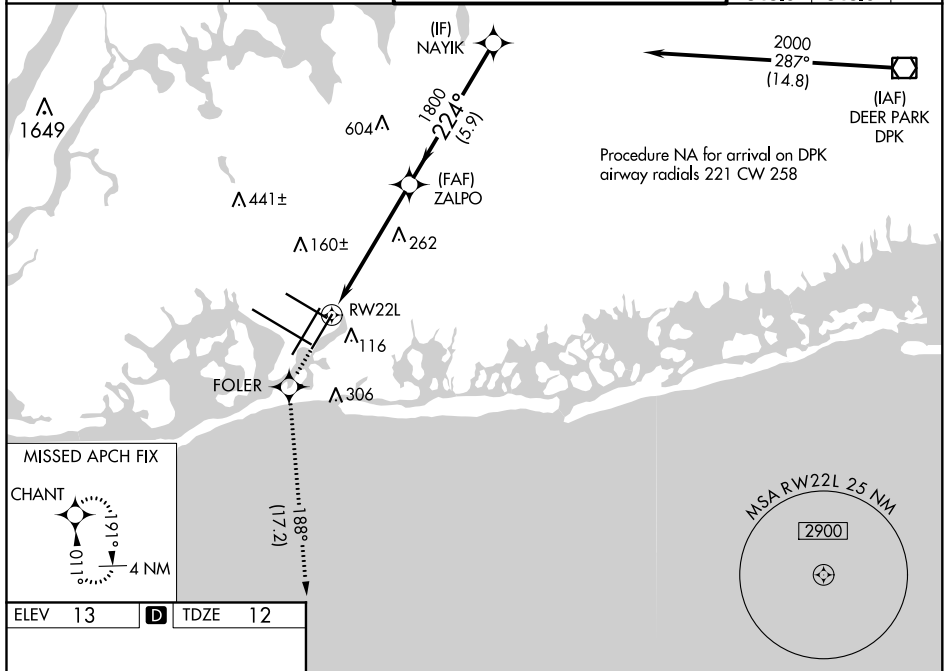

ELEV 13	D	TDZE 12
---------	----------	---------

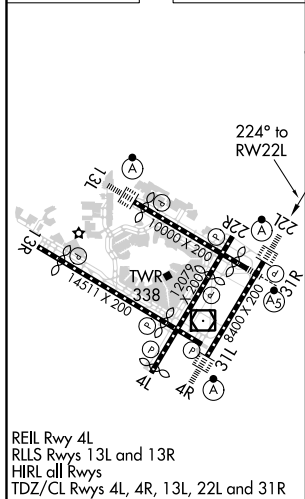

3000 ↑		FOLER ✦ fr 188°		CHANT ✦		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).	
*LNAV only.		*1.5 NM to RW22L		ZALPO 1800		NAYIK 2000	
RW22L 1.5		4 NM		5.9 NM		GP 3.00° TCH 53	
CATEGORY		A		B		C	
LPV DA		269/18		257 (300-½)			
LNAV/ VNAV DA		419/50		407 (500-1)			
LNAV MDA		560/24 548 (600-½)		560/60 548 (600-1¼)			
CIRCLING		640-1 627 (700-1)		680-1¼ 667 (700-1¼)		680-2 667 (700-2)	