RNAV (RNP) Z RWY 22L

NEW YORK / JOHN F. KENNEDY INTL (JFK)

APP CRS	Rwy Idg	8400
225°	TDZE	13
	Apt Elev	13

NA — For uncompensated Baro-VNAV systems, procedure NA below -13°C (8°F) or above 49°C (120°F). RF and GPS Required. For inoperative ALSF, increase RNP 0.20 DA visibility to RVR 5000 all Cats, RNP 0.30 DA visibility to RVR 6000 all Cats. Visibility reduction by helicopters NA.

ALSF-2

MISSED APPROACH: Climb to 3000 via 225° track to WEPLA and via 178° track to CHANT and hold.

ATIS			NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL
(ARR-NE)	(ARR-SW)						
128.725	117.7	115.4	127.4 269.0	Rwys 4R/22L and 13L/31R	119.1 281.55	121.9 348.6	135.05 348.6
				Rwys 4L/22R and 13R/31L	123.9 281.55		

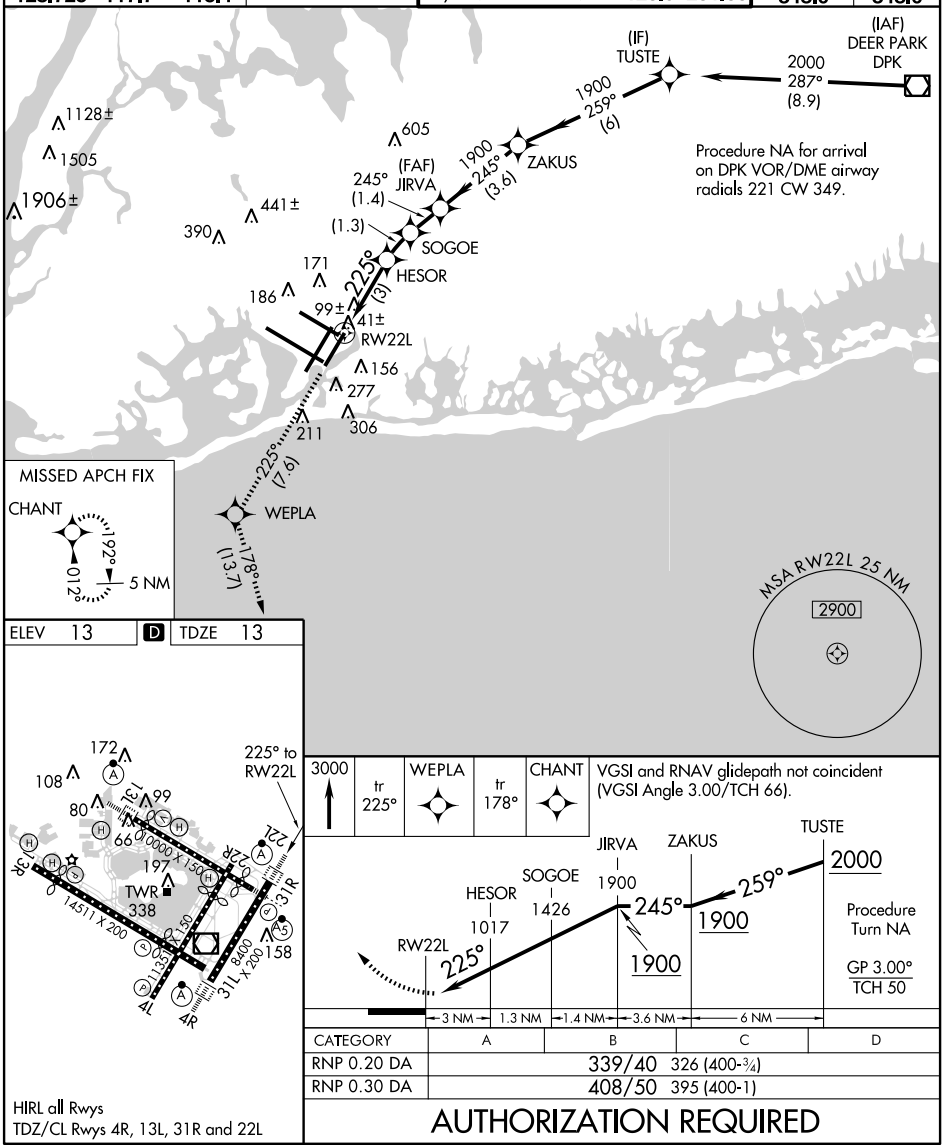

CATEGORY	A	B	C	D
RNP 0.20 DA	339/40 326 (400-¾)			
RNP 0.30 DA	408/50 395 (400-1)			

HIRL all Rwys
TDZ/CL Rwys 4R, 13L, 31R and 22L

AUTHORIZATION REQUIRED

NE-2, 15 DEC 2011 to 12 JAN 2012
NE-2, 15 DEC 2011 to 12 JAN 2012