

**LAUGHLIN/BULLHEAD INTL** (IFP)(KIFP) 1 N UTC-7 N35°09.28' W114°33.56'  
 707 B TPA—See Remarks Class I, ARFF Index B NOTAM FILE IFP  
**RWY 16-34:** H8501X150 (ASPH-GRVD) S-75, D-200, 2D-400  
 PCN 52 F/A/X/T MIRL

**PHOENIX**  
**H-4J, L-7E**  
**IAP, AD**

**RWY 16:** REIL. PAPI(P4L)—GA 3.0° TCH 49'. Pole. Rgt tfc. 0.9% up.  
**RWY 34:** REIL. PAPI(P4L)—GA 3.0° TCH 45'. 1.0% down.

**RUNWAY DECLARED DISTANCE INFORMATION**

**RWY 16:** TORA-8500 TODA-8500 ASDA-8500 LDA-8500  
**RWY 34:** TORA-8500 TODA-8500 ASDA-8500 LDA-8500

**SERVICE:** FUEL 100LL, JET A OX 1, 2 LGT ACTIVATE MIRL Rwy 16-34; REIL Rwy 16 & Rwy 34—CTAF.

**AIRPORT REMARKS:** Attended continuously. For services and fuel 1300-0700Z ctc frequency 122.85, between 0700-1300Z services and fuel not avbl. Sfc conditions not monitored 0600-1200Z† daily. Birds on and in vicinity of arpt Sep-Dec. Noise sensitive areas northeast and southeast of arpt. Twy A4 limited to acft with wingspans less than 79'. Twy A5 btn Twy A and general avn apron ltd to acft with wingspan less than 79'. Mountains northwest, northeast, east and southeast. TPA for light acft 1706(999), TPA for high performance acft 2206(1499).

**AIRPORT MANAGER:** 928-754-2134

**WEATHER DATA SOURCES:** AWOS-3PT 119.825 (928) 754-4462. ATIS broadcasts during tower hours of operation. after tower hours of operation broadcast will revert to AWOS-3pt using the same frequency.

**COMMUNICATIONS:** CTAF 123.9 ATIS 119.825 (1500-0100Z)

Ⓡ **L.A. CENTER APP/DEP CON** 134.65

**BULLHEAD TOWER** 123.9 (1500-0100Z) **GND CON** 118.25

**L.A. CENTER CLNC DEL** 118.25 (when tower closed)

**AIRSPACE:** CLASS D svc 1500-0100Z; other times CLASS G.

**RADIO AIDS TO NAVIGATION:** NOTAM FILE EED.

**NEEDLES (H) VORTAC** 115.2 EED Chan 99 N34°45.96' W114°28.45' 335° 23.7 NM to fld. 620/15E. **HIWAS.**

VORTAC unusable:

100°-130° byd 27 NM blo 6,600'


170°-220° byd 20 NM blo 5,800'

220°-280° byd 35 NM blo 6,800'

TACAN AZIMUTH & DME unusable:

165°-220° byd 20 NM blo 8,000'

165°-220° byd 30 NM blo 12,000'

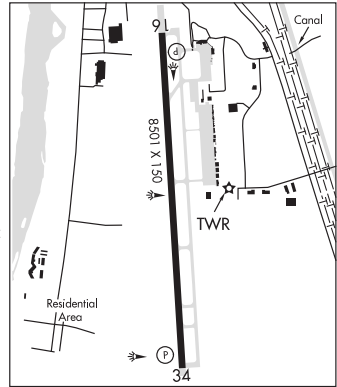

**SUN VALLEY** (A20) 7 S UTC-7 N35°00.34' W114°33.90'

**PHOENIX**  
**L-7E**

725 B NOTAM FILE PRC  
**RWY 18-36:** H3700X42 (ASPH) LIRL  
**RWY 18:** Road.

**RWY 36:** NSTD—GA 3.0°. Rgt tfc.

**SERVICE:** FUEL 100LL LGT NSTD VASI (red and white lghts like a PAPI) in a single unit located on the left side of rwy set at 3°. ACTIVATE LIRL Rwy 18-36—122.975.

**AIRPORT REMARKS:** Attended 1400-0100Z. 24 hr self svc 100LL with major credit card. All acft tfc stay east of arpt. No straight-in apch and departures. Rwy 18-36 + 2-6' brush 35' from rwy centerline entire length east side. Shallow drainage swale 25' in length located 40' right of Rwy 36 for entire rwy length. Rwy 18-36 NSTD markings, length and width. Acft tie down fee \$7.00 per night.

**AIRPORT MANAGER:** 760-315-5096

**COMMUNICATIONS:** CTAF/UNICOM 122.975

**CLEARANCE DELIVERY PHONE:** For CD ctc Los Angeles ARTCC at 661-575-2079.

**RADIO AIDS TO NAVIGATION:** NOTAM FILE EED.

**NEEDLES (H) VORTAC** 115.2 EED Chan 99 N34°45.96'

W114°28.45' 328° 15.0 NM to fld. 620/15E. **HIWAS.**

VORTAC unusable:

100°-130° byd 27 NM blo 6,600'

170°-220° byd 20 NM blo 5,800'

220°-280° byd 35 NM blo 6,800'

TACAN AZIMUTH & DME unusable:

165°-220° byd 20 NM blo 8,000'

165°-220° byd 30 NM blo 12,000'

