

WAAS CH 93700 W13A	APP CRS 132°	Rwy Idg TDZE 6502 1077 Apt Elev 1077
--	------------------------	--



RNAV (GPS) RWY 13

DUBUQUE RGNL (DBQ)


⚠ Inop table does not apply to LPV and LNAV/VNAV. Baro-VNAV NA when using Monticello altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Monticello altimeter setting. If local altimeter setting not received, use Monticello altimeter setting and increase all DAs/MDAs 100 feet.

MALS MISSED APPROACH: Climb to 3100 direct JIPDA and hold.

ATIS 127.25	CHICAGO CENTER 133.95 281.4	DUBUQUE TOWER * 119.5 (CTAF) 254.4	GND CON 121.8	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

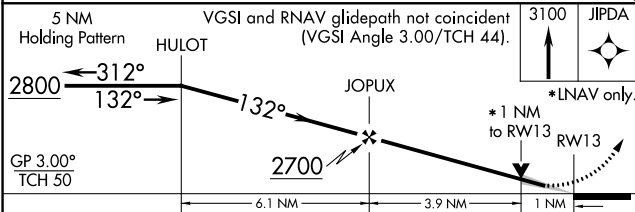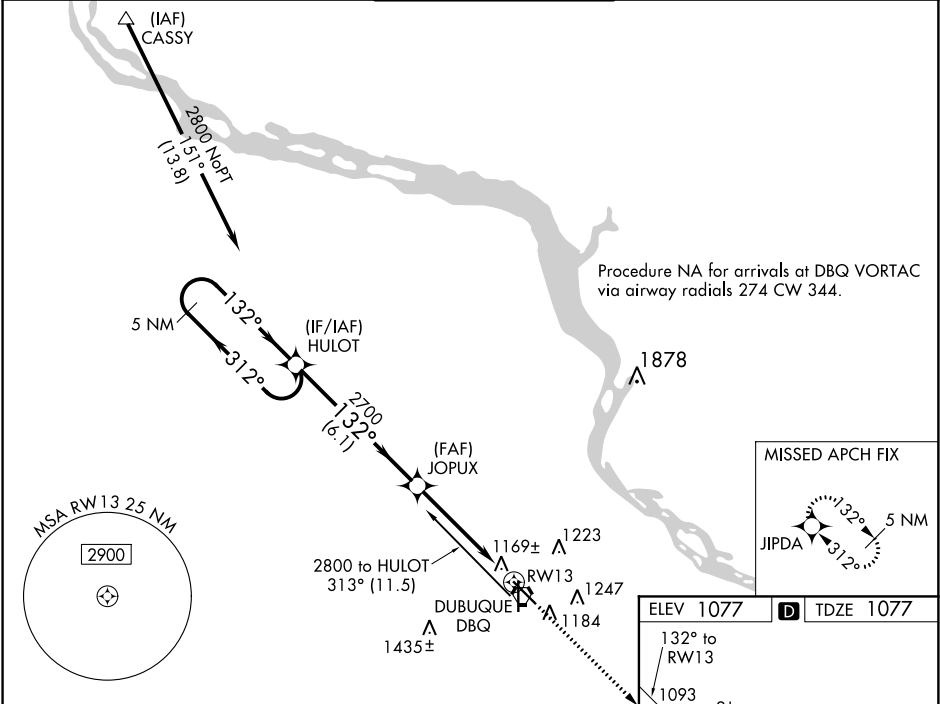

CATEGORY	A	B	C	D
LPV DA	1393-1		316 (400-1)	
LNAV/VNAV DA	1574-1¾		497 (500-1¾)	
LNAV MDA	1420-¾		343 (400-¾)	
CIRCLING	1580-1¾		503 (600-1¾)	
			1420-1¼	
			343 (400-1¼)	
			1640-2	
			563 (600-2)	

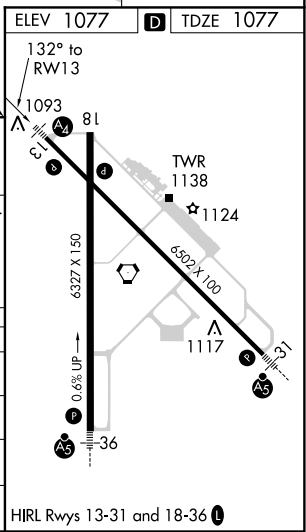

NC-3, 03 JAN 2019 to 31 JAN 2019

NC-3, 03 JAN 2019 to 31 JAN 2019