WAAS	APP CRS	Rwy Idg	6598
CH 77838	178°	TDZE	1098
W17A		Apt Elev	1098

RNAV (GPS) RWY 17

SIOUX GATEWAY/COLONEL BUD DAY FIELD (SUX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Le Mars altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Le Mars altimeter setting and increase all DA 70 feet and visibility ¼ mile. Increase all MDA 80 feet and LNAV Cats C/D visibility ⅛ mile and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct POGAE and hold.

ATIS	SIOUX CITY APP CON ★	SIOUX CITY TOWER ★	GND CON	UNICOM
119.45 270.8	124.6 307.0	118.7 (CTAF) L 254.3	121.9 348.6	122.95

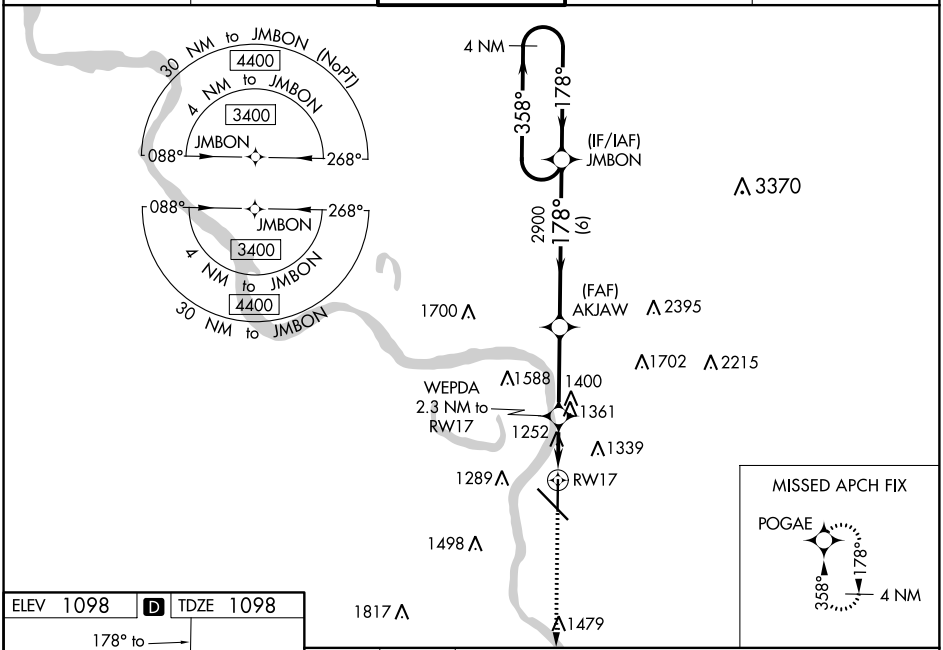

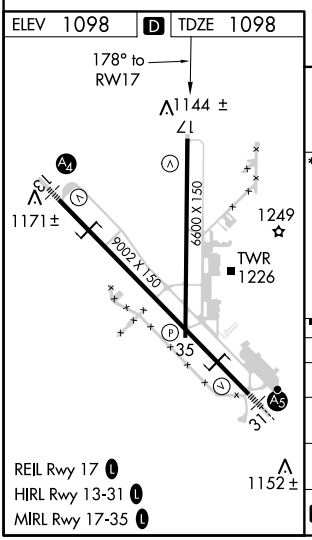

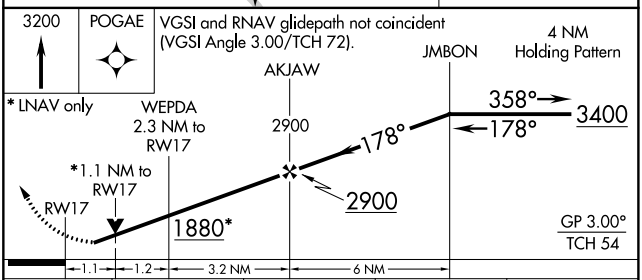

CATEGORY	A	B	C	D
LPV DA	1364-⅞ 266 (300-⅞)			
LNAV/VNAV DA	1531-1⅜ 433 (500-1⅜)			
LNAV MDA	1520-1 422 (500-1)		1520-1¼ 422 (500-1¼)	
C CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1¾ 602 (700-1¾)	1840-2½ 742 (800-2½)

NC-3, 31 JAN 2019 to 28 FEB 2019
NC-3, 31 JAN 2019 to 28 FEB 2019