WAAS CH 48803 W28A	APP CRS 284°	Rwy Idg 11236 / TDZE 13 / Apt Elev 13

RNAV (GPS) Z RWY 28R

SAN FRANCISCO INTL (SFO)

RNP APCH.

Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM, increase LNAV Cat C/D visibility to 2 SM.

ALSF-2

MISSED APPROACH: Climb to 3200 direct VIKYU and hold, continue climb-in-hold to 3200.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

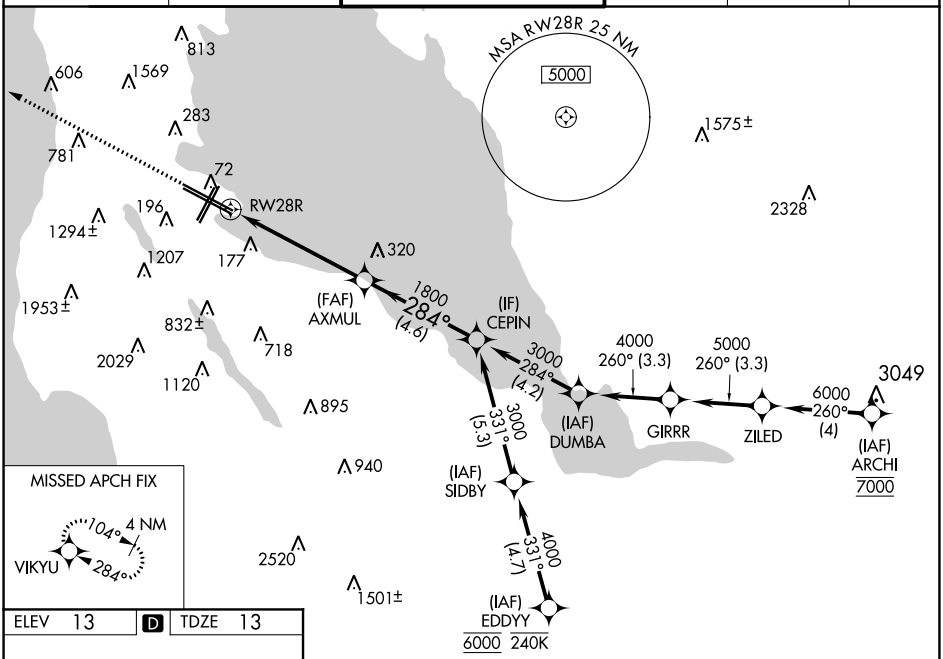

ELEV 13 | D | TDZ 13



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

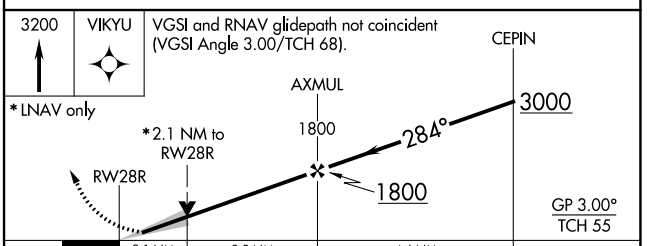

CATEGORY	A	B	C	D
LPV DA	213/18 200 (200-½)			
LNAV/VNAV DA	642-1⅜ 629 (700-1⅜)			
LNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1¾ 747 (800-1¾)	
C CIRCLING	760-1 747 (800-1)	960-1¼ 947 (1000-1¼)	1560-3 1547 (1600-3)	NA

SW-2, 25 MAR 2021 to 22 APR 2021
SW-2, 25 MAR 2021 to 22 APR 2021