




LOC I-HEF 109.1	APP CRS 161°	Rwy Idg TDZE Apt Elev	6200 192 192
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 16L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

<p>When local altimeter setting not received, use Dulles altimeter setting and increase DA 49 feet, all MDA 60 feet, and increase Cat C/D Circling visibility ¼ mile.</p>	<p>MALS R</p>	<p>MISSED APPROACH: Climb to 700, then climbing right turn to 3000 direct CSN VORTAC and hold.</p>		
			<p>ATIS 125.175</p>	<p>POTOMAC APP CON 128.525 306.925</p>

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER * 133.1 (CTAF) 360.75	GND CON 121.8	CLNC DEL 120.2
------------------------	---	--	-------------------------	--------------------------

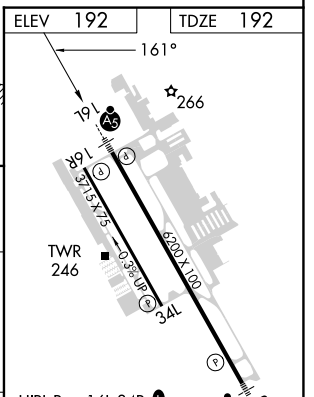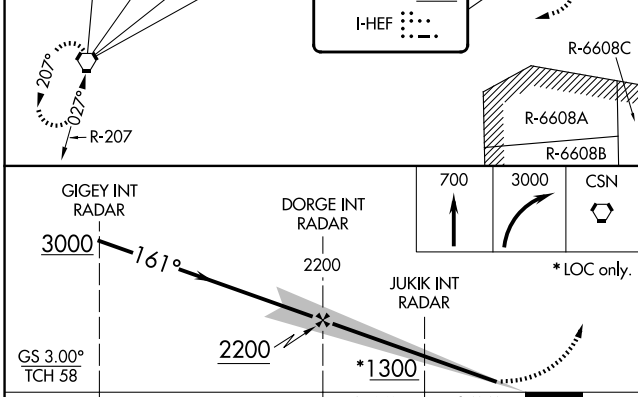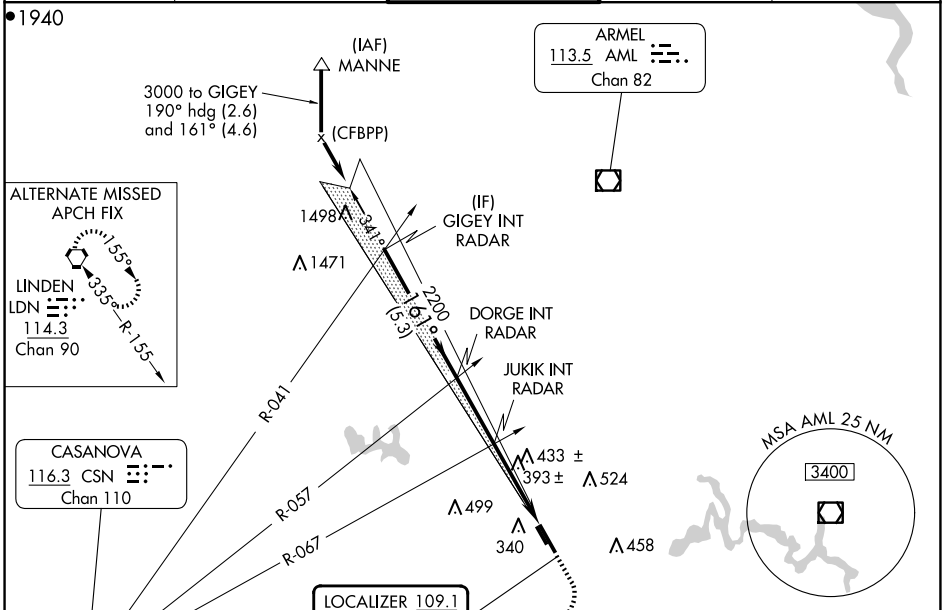

CATEGORY	A	B	C	D
S-ILS 16L	392-½ 200 (200-½)			
S-LOC 16L	660-½	468 (500-½)	660-1	468 (500-1)
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1¾ 648 (700-1¾)	880-2¼ 688 (700-2¼)
FAF to MAP 6.1 NM				
Knots 60 90 120 150 180				
Min:Sec 6:06 4:04 3:03 2:26 2:02				

NE-3, 20 FEB 2025 to 20 MAR 2025

NE-3, 20 FEB 2025 to 20 MAR 2025