

WAAS CH 93506 W05A	APP CRS 061°	Rwy Ldg TDZE 3952 Apt Elev 3967
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) RWY 5

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)


▼

▲

Baro-VNAV NA when using Alliance altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 51°C (124°F). When local altimeter setting not received, use Alliance altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LPV all Cats visibility 3⁄8 mile, LNAV/VNAV all Cats visibility 1⁄4 mile, LNAV Cats C/D visibility 1⁄4 mile, Circling Cat C visibility 1⁄2 mile and Cat D visibility 1⁄4 mile.

MISSED APPROACH:
Climb to 4400 then climbing right turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.

ASOS 121.025	DENVER CENTER 127.95 338.2	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

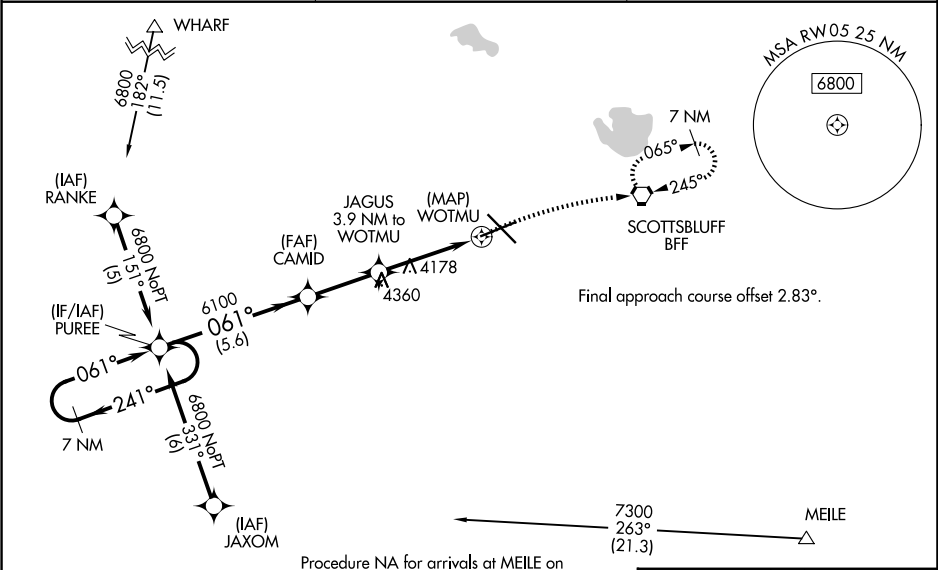

ELEV 3967

TDZE 3952

7 NM Holding Pattern	PUREE	CAMID	JAGUS 3.9 NM to WOTMU	WOTMU
6800	6100	6100	*5240	
GP 3.00° TCH 50	5.6 NM	2.7 NM	3.9 NM	

CATEGORY	A	B	C	D
LPV DA	4202-1		250 (300-1)	
LNAV/VNAV DA	4418-1½		466 (500-1½)	
LNAV MDA	4480-1	528 (600-1)	4480-1½	528 (600-1½)
CIRCLING	4500-1	533 (600-1)	4560-1½ 593 (600-1½)	4720-2½ 753 (800-2½)

HIRL Rwy 12-30

MIRL Rwy 5-23