WAAS CH 77621 W24A	APP CRS 265°	Rwy ldg 6003 TDZE 583 Apt Elev 584

RNAV (GPS) RWY 24R
BURKE LAKEFRONT (BKL)

RNP APCH.
Circling Rwy 6R NA at night.
Rwy 24R helicopter visibility reduction below ¾ SM NA.
Circling NA SE of Rwy 6R and 24L.
For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM.

MALSF

MISSED APPROACH: Climbing right turn direct TOMMK, cross TOMMK at 2000, then climb to 3000 on track 340° to ZAMDO and hold.

ATIS	CLEVELAND APP CON	LAKEFRONT TOWER ★	GND CON	CLNC DEL	CLNC DEL (when twr closed)	UNICOM
125.25	125.35 346.325	124.3 (CTAF) L 339.8	121.9 339.8	339.8	121.9	122.95 L

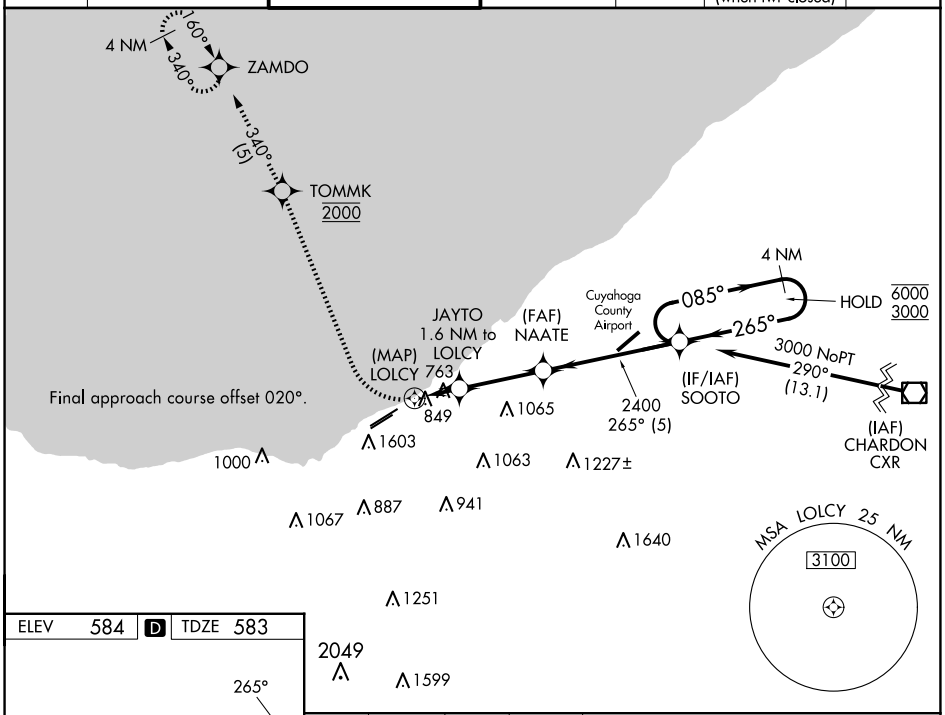

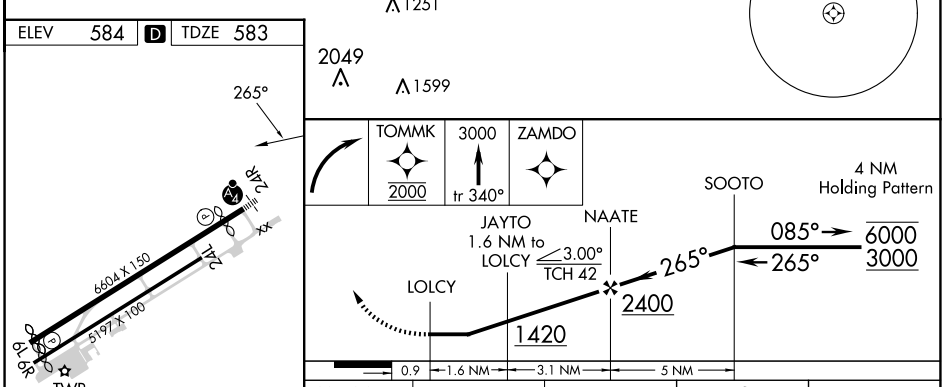

REIL Rwy 6L L
REIL Rwy 24L
HIRL Rwy 6L-24R L
HIRL Rwy 6R-24L

CATEGORY	A	B	C	D
LP MDA	1020-¾ 437 (500-¾)		1020-1 437 (500-1)	
LNAV MDA	1100-¾ 517 (600-¾)		1100-1¼ 517 (600-1¼)	
C CIRCLING	1100-1 516 (600-1)		1140-1½ 556 (600-1½)	1200-2 616 (700-2)

EC-2, 07 AUG 2025 to 04 SEP 2025
EC-2, 07 AUG 2025 to 04 SEP 2025