ILS or LOC RWY 14

SCHOLES INTL AT GALVESTON (GLS)

LOC I-GLS	APP CRS	Rwy Idg	6000
111.7	138°	TDZE	5
		Apt Elev	6

T NA Circling NA east of Rwy 18 and northeast of Rwy 32. When local altimeter setting not received, use William P Hobby altimeter setting and increase all DA and MDA 80 feet, increase S-LOC 14 Cat C/D/E visibility to 1 mile, and Circling Cat E visibility to 2½ mile. For inop MALSR, increase S-ILS 14 Cat E visibility to ¾ and S-LOC 14 Cat E visibility to 1⅜ mile. For inop MALSR when using William P Hobby altimeter setting, increase S-ILS 14 all Cats visibility to ⅞ mile, and S-LOC 14 Cat E visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 284° and on VUH VOR/DME R-243 to DELVE INT/VUH 22.1 DME and hold.

ASOS	HOUSTON APP CON	GALVESTON TOWER★	GND CON	CLNC DEL	UNICOM
119.275	134.45 284.0	120.575 (CTAF) L	118.625	135.35 (When tower closed)	123.05

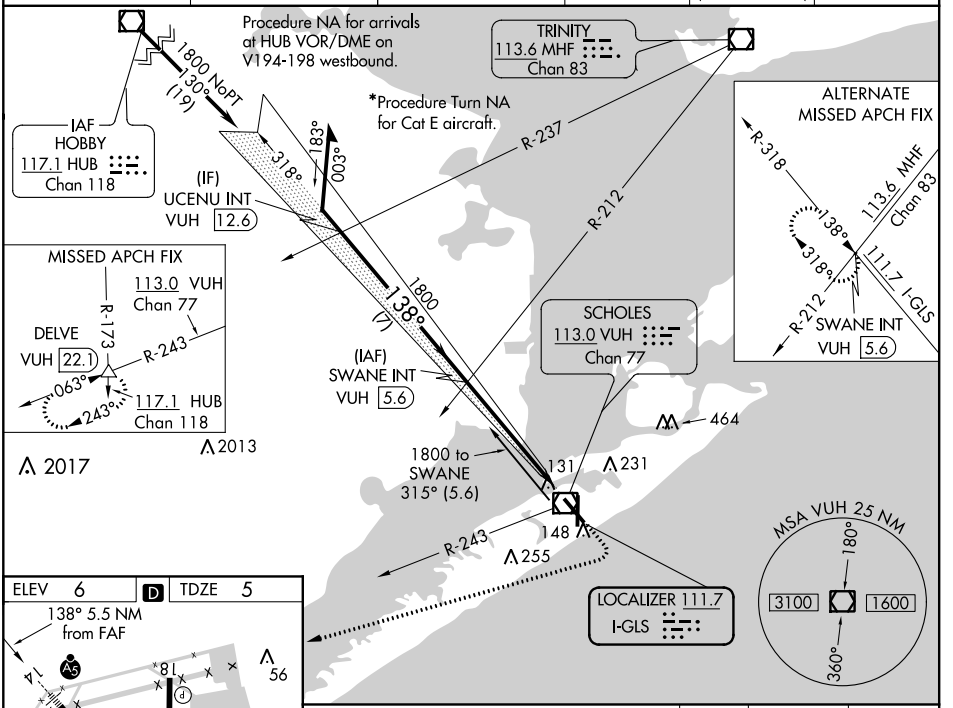

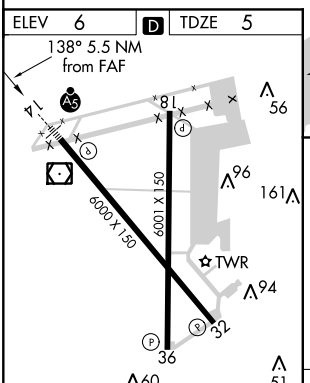

FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

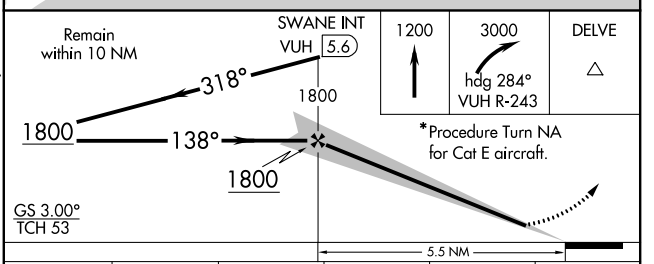

CATEGORY	A	B	C	D	E
S-ILS 14	205-½ 200 (200-½)				
S-LOC 14	460-½ 455 (500-½)		460-⅞ 455 (500-⅞)		
CIRCLING	500-1 494 (500-1)		500-1½ 494 (500-1½)	560-2 554 (600-2)	620-2¼ 614 (700-2¼)

SC-5, 31 JAN 2019 to 28 FEB 2019
SC-5, 31 JAN 2019 to 28 FEB 2019