# RNAV (GPS) RWY 1

## ALPENA COUNTY RGNL (APN)

| WAAS CH 50310 W01A | APP CRS 007° | Rwy Idg 9001 TDZE 685 Apt Elev 690 |
|---|---|---|

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rogers City altimeter setting and increase all DA 55 feet and all MDA 60 feet and increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C and D visibilities ¼ mile. Baro-VNAV and VDP NA when using Roger City altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to 1. -32°C

MALSR

MISSED APPROACH: Climb to 3500 direct HIMVO and via 307° track to RABBO and hold.

| ASOS | ALPENA APP CON ★ | ALPENA TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 120.675 | 128.425 379.3 | 121.35 (CTAF) L 318.1 | 121.9 275.8 | 122.95 |

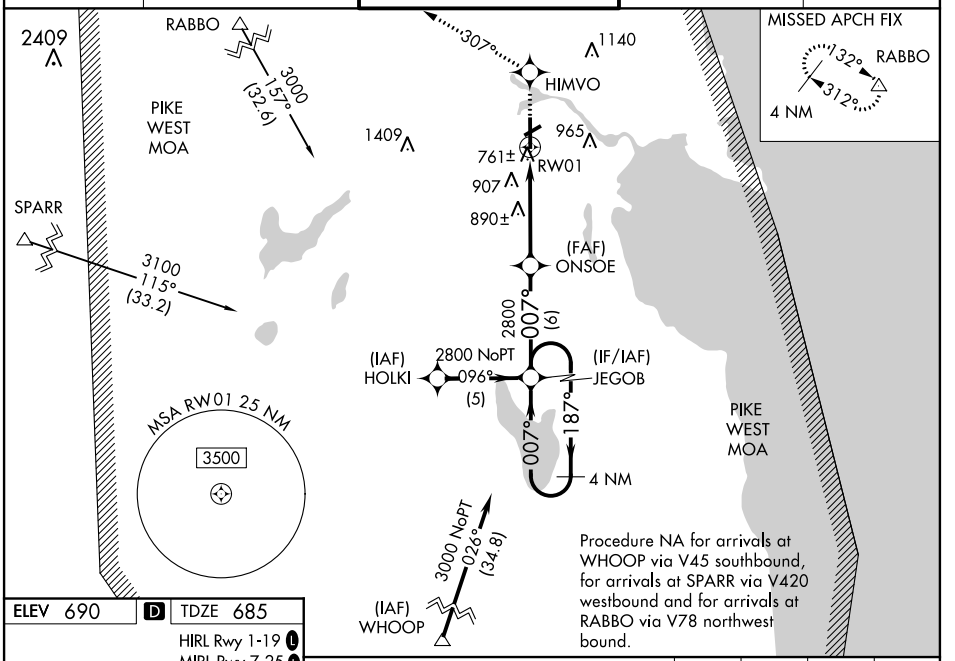


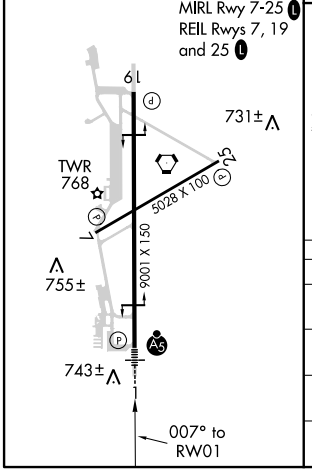


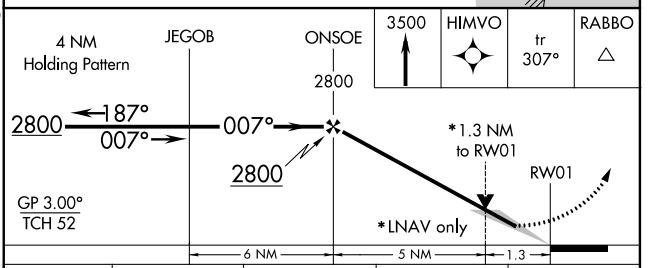


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 974-½ 289 (300-½) | | | |
| LNAV/VNAV DA | 1029-¾ 344 (400-¾) | | | |
| LNAV MDA | 1160-½ 475 (500-½) | | 1160-¾ 475 (500-¾) | 1160-1 475 (500-1) |
| CIRCLING | 1160-1 470 (500-1) | | 1160-1½ 470 (500-1½) | 1260-2 570 (600-2) |

EC-1, 31 JAN 2019 to 28 FEB 2019

EC-1, 31 JAN 2019 to 28 FEB 2019