ILS or LOC RWY 27L

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

LOC/DME I-FSQ	APP CRS		27L	27R
108.5	275°	Rwy Idg	8865	11690
Chan 22		TDZE	999	985
		Apt Elev	1026	1026

Inop table does not apply to Sidestep Rwy 27R.
Simultaneous approach authorized with Rwy 26R or 26L.

Rwy 27L ALSF-2 (A)

Rwy 27R MALS (A4)

MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 on ATL VORTAC R-273 to TEMPO INT/ATL 30.3 DME/RADAR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						GND CON			
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1 | CPDLC

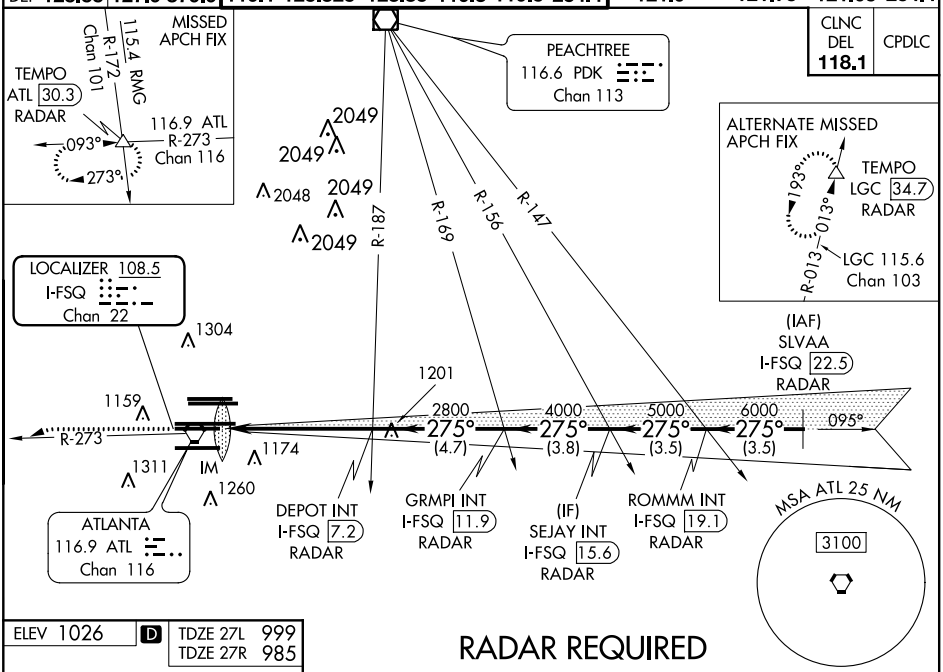

ELEV 1026 (D) TDZE 27L 999 TDZE 27R 985

RADAR REQUIRED



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

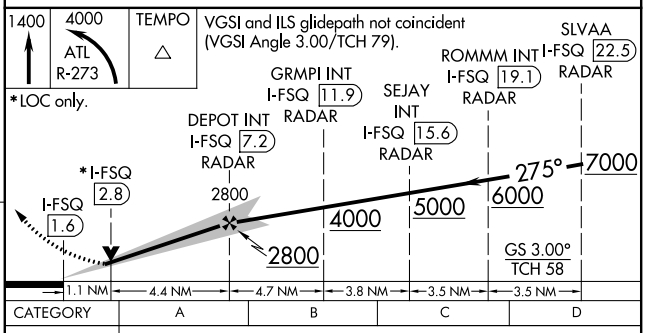

CATEGORY	A	B	C	D
S-ILS 27L	1199/18 200 (200-½)			
S-LOC 27L	1420/24 421 (400-½)		1420/40 421 (400-¾)	
SIDESTEP 27R	1420-1¾ 435 (400-1¾)		1420-2¼ 435 (400-2¼)	

SE-4, 28 FEB 2019 to 28 MAR 2019