# ILS or LOC RWY 31R

JOHN F KENNEDY INTL (JFK)

| LOC/DME I-RTH | APP CRS | Rwy Idg | 8486 |
|---|---|---|---|
| 111.5 | 314° | TDZE | 12 |
| Chan 52 | | Apt Elev | 13 |

RADAR required for procedure entry.

Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct CRI VOR/DME then on CRI VOR/DME R-225 to COL VOR/DME and hold.

| D-ATIS (ARR/DEP) | (ARR-NE) | (ARR-SW) | NEW YORK APP CON | KENNEDY TOWER | | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|---|---|---|
| 128.725 | 117.7 | 115.4 | 128.125 269.0 | Rwys 4R/22L and 13L/31R | 119.1 281.55 | 121.9 | 135.05 | |
| | | | | Rwys 4L/22R and 13R/31L | 123.9 281.55 | 348.6 | 348.6 | |

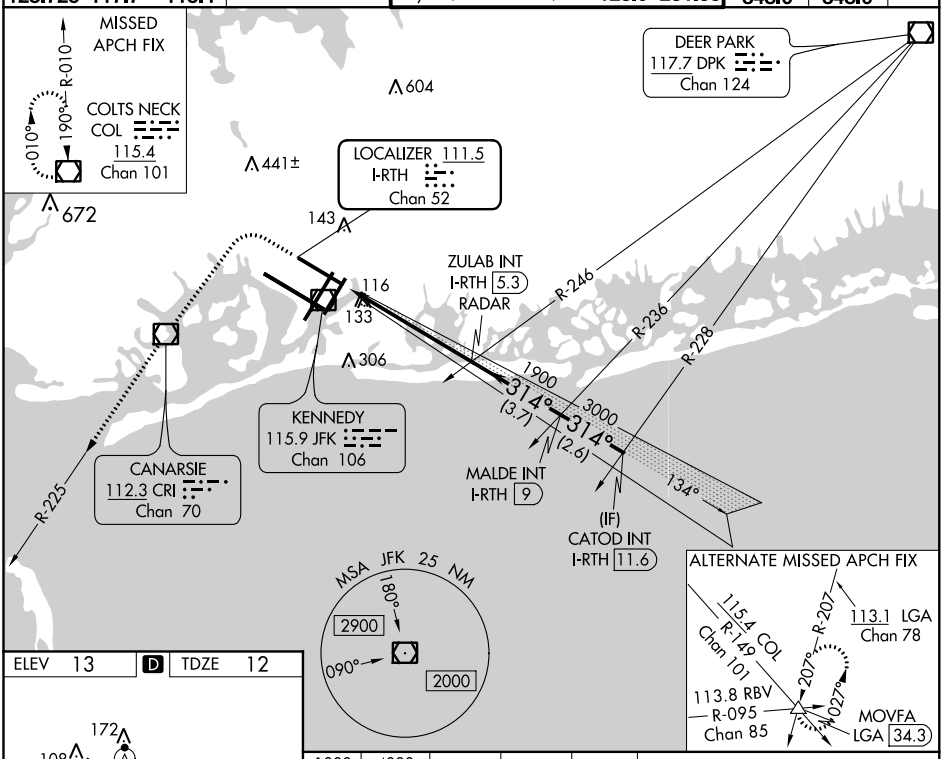





| FAF to MAP 5.7 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:42 | 3:48 | 2:51 | 2:17 | 1:54 |

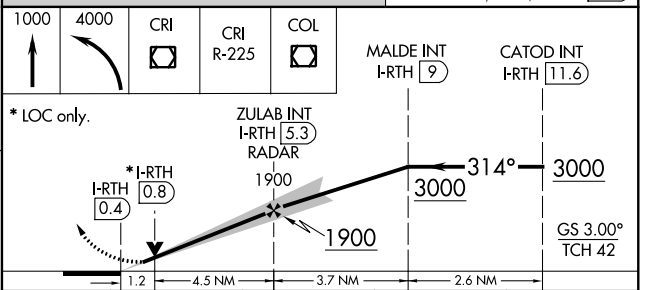


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 31R | 212/18 | 200 (200-½) | | |
| S-LOC 31R | 440/24 | 428 (500-½) | 440/40 | 428 (500-¾) |
| C CIRCLING | 640-1 | 627 (700-1) | 640-1¾ 627 (700-1¾) | 660-2 647 (700-2) |



NE-2, 28 FEB 2019 to 28 MAR 2019
NE-2, 28 FEB 2019 to 28 MAR 2019