

LOC/DME I-XPX 110.7 Chan 44	APP CRS 281°	Rwy Idg TDZE Apt Elev	6018 799 799
--	------------------------	-----------------------------	---

ILS or LOC RWY 28

CLEVELAND-HOPKINS INTL (CLE)


RNAV 1. From HARDR: RNAV 1-DME/DME/IRU or GPS required for procedure entry.
Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME required.

MALSF



MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.

Circling Rwy 10 NA at night. Inop table does not apply to S-ILS 28.

D-ATIS ARR 127.85 DEP 132.375	CLEVELAND APP CON 124.0 354.025	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45	CLNC DEL 125.05 273.45	CPDLC
---	---	--	--------------------------------	----------------------------------	-------

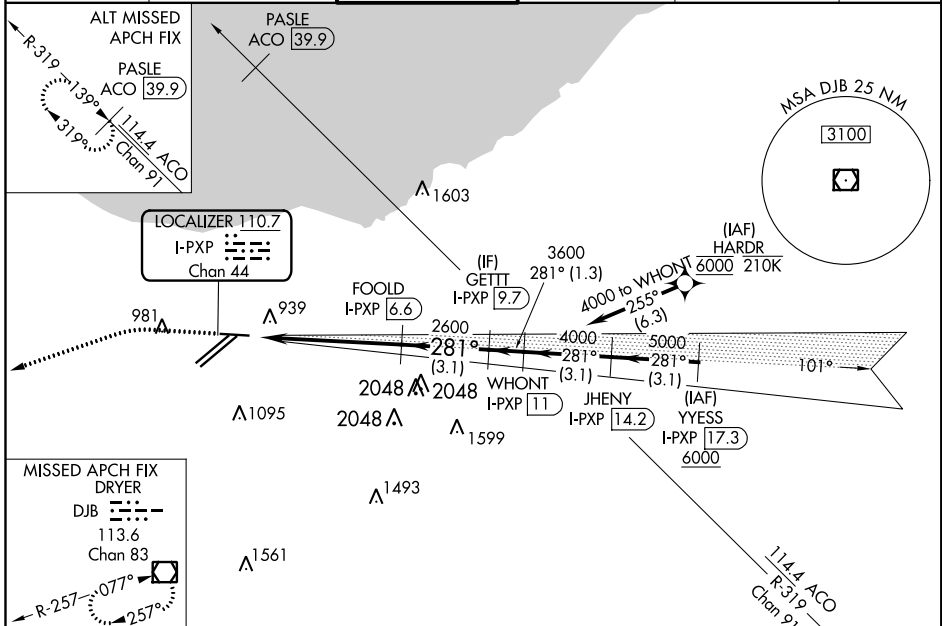

ELEV 799	D	TDZE 799
----------	----------	----------

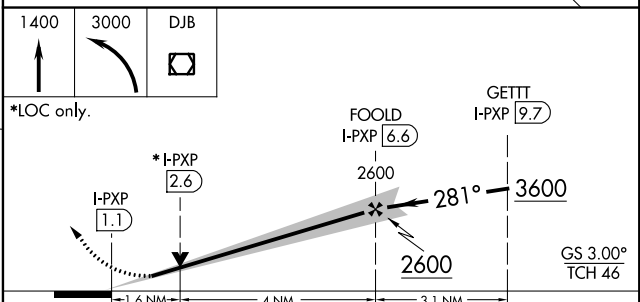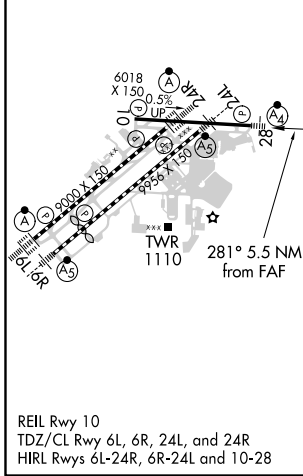

CATEGORY	A	B	C	D
S-ILS 28	999/40		200 (200-¾)	
S-LOC 28	1340/40	541 (600-¾)	1340-1⅓	541 (600-1⅓)
C CIRCLING	1420-1	621 (700-1)	1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

EC-2. 15 AUG 2019 to 12 SEP 2019

EC-2. 15 AUG 2019 to 12 SEP 2019