


WAAS CH 50301 W25A	APP CRS 246°	Rwy Idg TDZE Apt Elev	5500 515 529
---------------------------------	------------------------	-----------------------------	---



RNAV (GPS) RWY 25

AIKEN RGNL (AIK)



Baro-VNAV NA when using Augusta Rgnl at Bush Field altimeter setting.
NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. VDP NA with Augusta Rgnl at Bush Field altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Field altimeter setting. Increase LPV all Cats DA to 869 feet, LNAV/VNAV all Cats DA to 927 feet and all visibilities 3/8 mile; increase all MDA 120 feet and Cat C/D visibilities 1/4 mile. For inop ODALS, increase LPV all Cats visibility to 7/8 mile, LNAV/VNAV all Cats to 1 1/8 mile and LNAV Cat C/D to 1/4 mile. For inop ODALS when using Augusta Rgnl at Bush Field altimeter setting, increase LPV all Cats visibility to 1/4 mile, LNAV/VNAV all Cats to 1/2 mile and LNAV Cat D to 1/8 mile.

ODALS
 MISSED APPROACH:
 Climb to 3000 direct VIXLY and hold.

AWOS-3 118.025	AUGUSTA APP CON * 119.15 284.625	CLNC DEL 126.075	UNICOM 122.8 (CTAF)
--------------------------	--	----------------------------	-------------------------------

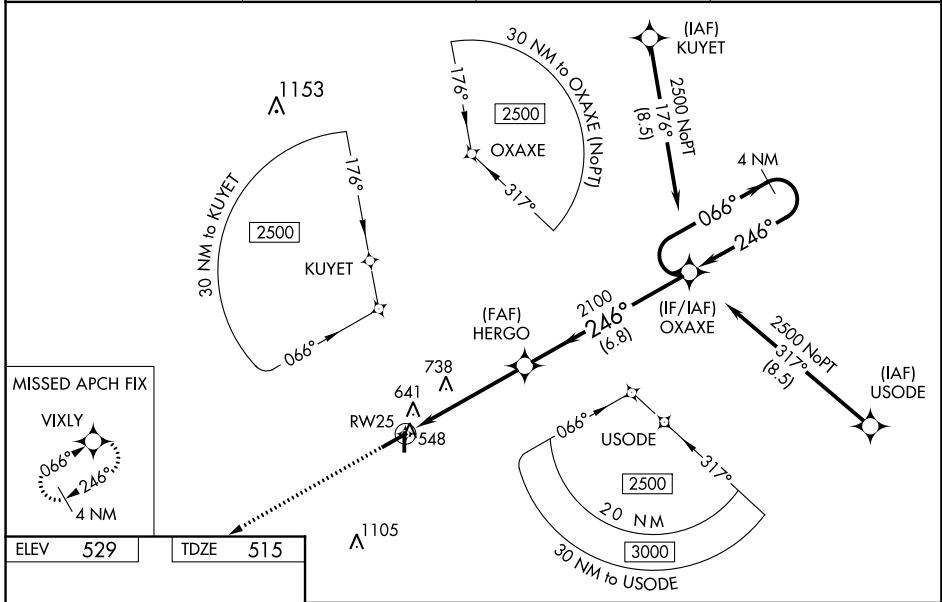

ELEV 529	TDZE 515
----------	----------

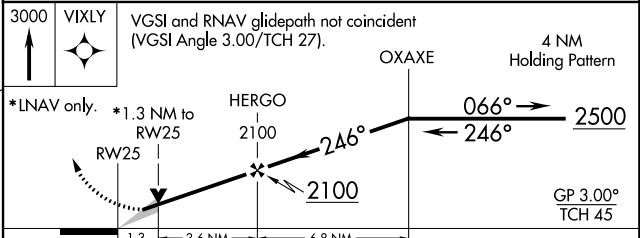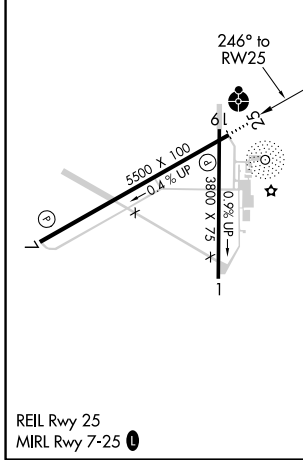

CATEGORY	A	B	C	D
LPV DA		765-3/4	250 (300-3/4)	
LNAV/VNAV DA		823-1	308 (300-1)	
LNAV MDA	940-3/4	425 (500-3/4)	940-1 1/8	425 (500-1 1/8)
CIRCLING	980-1 451 (500-1)	1000-1 471 (500-1)	1000-1 1/2 471 (500-1 1/2)	1080-2 551 (600-2)

SE-2. 15 AUG 2019 to 12 SEP 2019

SE-2. 15 AUG 2019 to 12 SEP 2019