ILS or LOC RWY 13

GENERAL DOWNING-PEORIA INTL (PIA)

LOC I-GZX	APP CRS	Rwy Idg	9604
109.9	129°	TDZE	636
		Apt Elev	661

ADF required for missed approach.

For inoperative MALSR, increase S-LOC 13 Cat C/D visibility to 1⅜ mile. Circling Rwy 13, 31 NA at night.
* RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct PI LOM and hold.

ATIS	PEORIA APP CON	PEORIA TOWER	GND CON
126.1 282.2	125.8 269.2 (305°-125°) 124.675 317.55 (126°-304°)	124.0 353.85	121.85 348.6

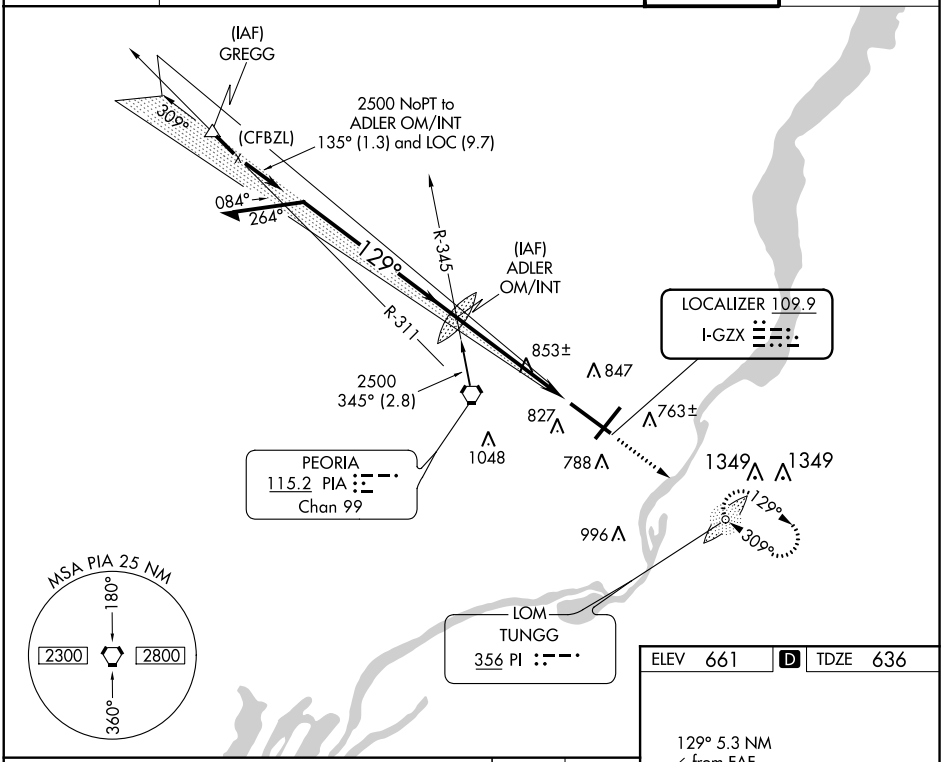

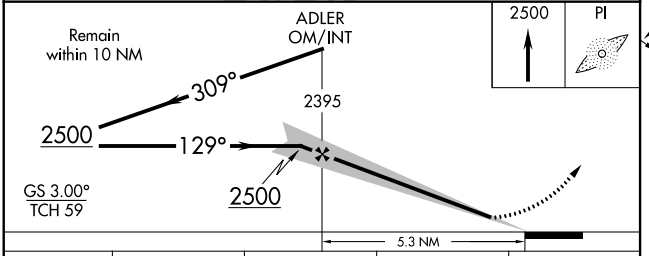

CATEGORY	A	B	C	D
S-ILS 13	*836/24 200 (200-½)			
S-LOC 13	1120/24 484 (500-½)		1120/50 484 (500-1)	
C CIRCLING	1160-1 499 (500-1)		1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

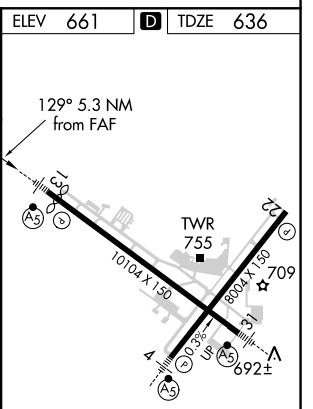

HIRL Rwys 4-22 and 13-31

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

EC-3, 21 MAY 2020 to 18 JUN 2020
EC-3, 21 MAY 2020 to 18 JUN 2020