RNAV (RNP) Z RWY 16R

DENVER INTL (DEN)

APP CRS	Rwy Idg	TDZE	Apt Elev
173°	16000	5326	5434

GPS required. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 46°C (116°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct BINBE and hold, continue climb-in-hold to 10000.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
ARR 125.6 379.9 DEP 134.025	119.3 307.3 (NORTH) 120.35 379.3 (SOUTH)	135.3 351.95	127.5 379.175	118.75	

RADAR REQUIRED

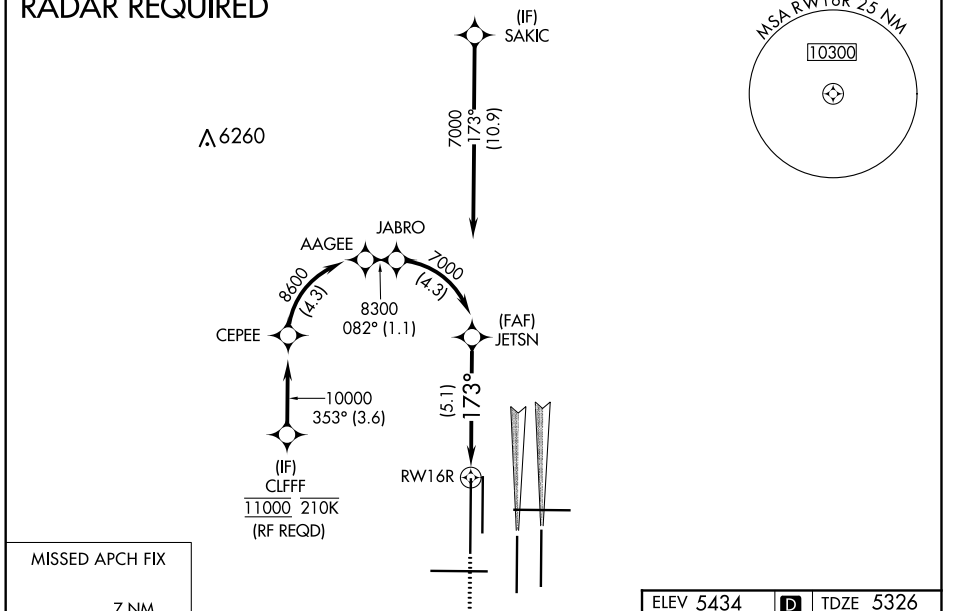

MISSED APCH FIX



5900	10000	BINBE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

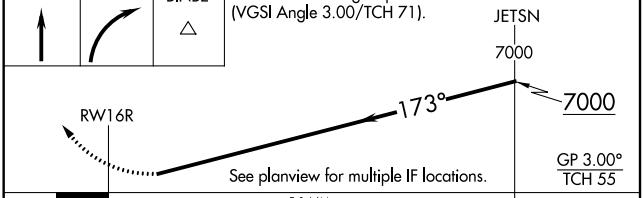

CATEGORY	A	B	C	D
RNP 0.10 DA	5586/50 260 (200-1)			
RNP 0.30 DA	5651/50 325 (300-1)			

AUTHORIZATION REQUIRED

ELEV 5434 D TDZE 5326

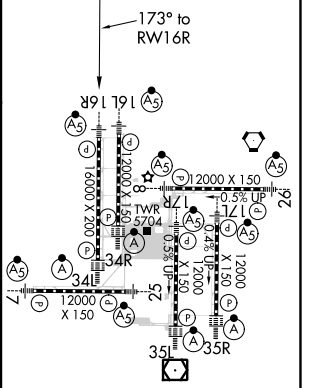

HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

SW-1, 21 MAY 2020 to 18 JUN 2020
SW-1, 21 MAY 2020 to 18 JUN 2020