


WAAS CH 70518 W35A	APP CRS 350°	Rwy Idg TDZE Apt Elev	5014 1135 1137
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 35



HAMILTON MUNI (VGC)

RNP APCH.			<p>MISSED APPROACH: Climb to 3500 direct KREMM and hold.</p>
<p>▼ Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 50°C. When local altimeter setting not received, use Syracuse altimeter setting and increase LPV DA to 1748, LNAV/VNAV DA to 2164 and all MDA 180 feet; increase LPV visibility to $1\frac{3}{4}$ SM and LNAV Cat A/B visibility to $1\frac{1}{2}$ SM and Cat C visibility to $2\frac{1}{2}$ SM.</p>			

AWOS-3P 119.425	SYRACUSE APP CON 126.125 269.125	UNICOM 123.0 (CTAF)	122.7
---------------------------	--------------------------------------------	-------------------------------	--------------

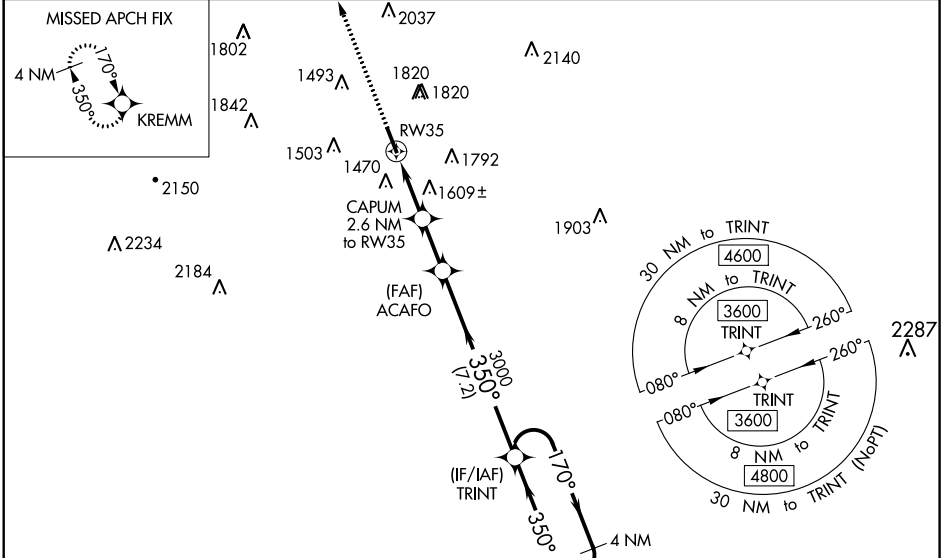

ELEV 1137	D	TDZE 1135
-----------	----------	-----------

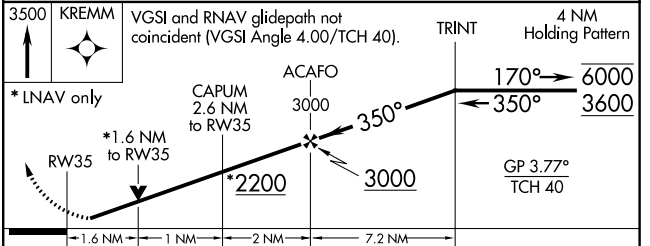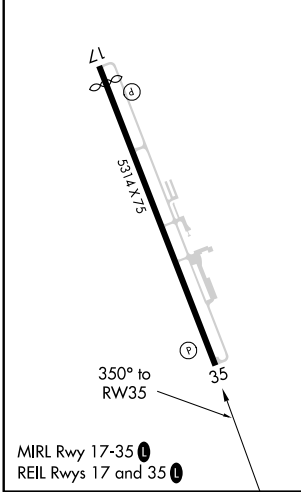

CATEGORY	A	B	C	D
LPV DA	1581-1 $\frac{3}{8}$		446 (500-1 $\frac{3}{8}$)	NA
LNAV/VNAV DA	1997-4		862 (900-4)	NA
LNAV MDA	1860-1	725 (800-1)		1860-2 725 (800-2)
C CIRCLING	2040-1 $\frac{1}{4}$ 903 (1000-1 $\frac{1}{4}$)	2120-1 $\frac{1}{2}$ 983 (1000-1 $\frac{1}{2}$)	2340-3 1203 (1300-3)	NA