

ILS or LOC RWY 5

MIDDLE GEORGIA RGNL (MCN)

LOC I-MCN 109.5	APP CRS 054°	Rwy Idg 6221
		TDZE 344
		Apt Elev 354




DME required.

DME from MCN VORTAC. Simultaneous reception of I-MCN and MCN DME required. For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000 and S-LOC 5 Cats C/D/E visibility to 1 1/2 SM.
****RVR 1800 authorized with use of FD or AP or HUD to DA.**

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2300 on MCN VORTAC R-028 to MURVE INT/MCN 17 DME and hold.

ATIS 120.775	ATLANTA APP CON * 124.2 279.6	MACON TOWER * 128.2 (CTAF) 257.8	GND CON 121.65	UNICOM 122.95
------------------------	---	--	--------------------------	-------------------------

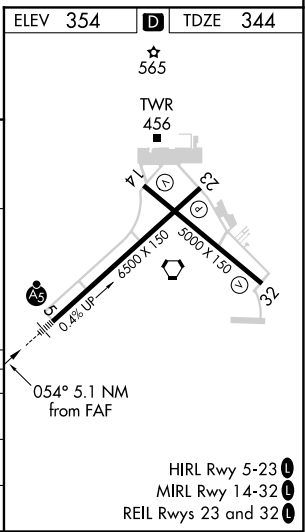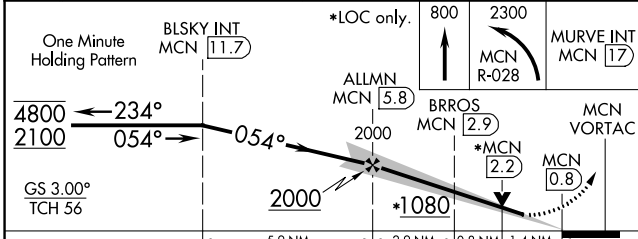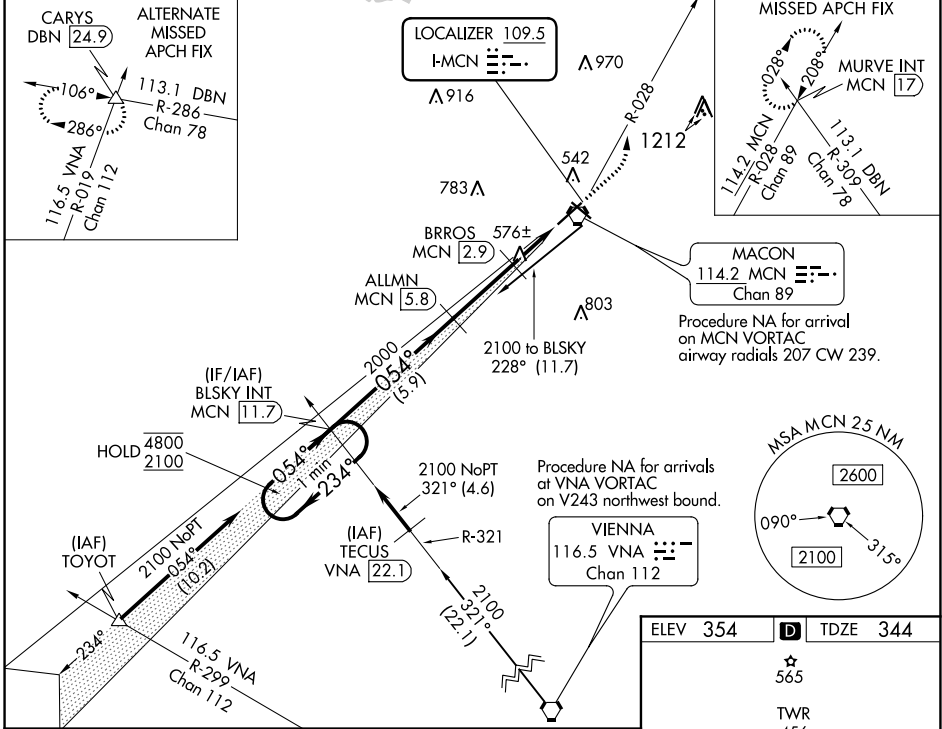

CATEGORY	A	B	C	D	E
S-ILS 5**	544/24 200 (200-1/2)				
S-LOC 5	840/24	496 (500-1/2)	840/50		496 (500-1)
C CIRCLING	900-1	546 (600-1)	920-1 1/2	1120-2 1/2	1180-3
			566 (600-1 1/2)	766 (800-2 1/2)	826 (900-3)

SE-4, 25 MAR 2021 to 22 APR 2021

SE-4, 25 MAR 2021 to 22 APR 2021