RNAV (GPS) RWY 4

PUNTA GORDA (PGD)

WAAS	APP CRS	Rwy Idg	7193
CH 48807	035°	TDZE	24
W04A		Apt Elev	26

RNP APCH.

When local altimeter setting not received, use Page Field altimeter setting and increase LPV DA to 274 feet, LNAV/VNAV DA to 443 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ⅛ SM, LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct DOGLE and track 087° to JOCKS and hold.

ATIS ★	FORT MYERS APP CON ★	PUNTA GORDA TOWER ★	GND CON	CLNC DEL	CLNC DEL (When twr closed)	UNICOM
135.675	127.05 306.2	121.0 (CTAF) L	119.55	119.55	127.05	122.975

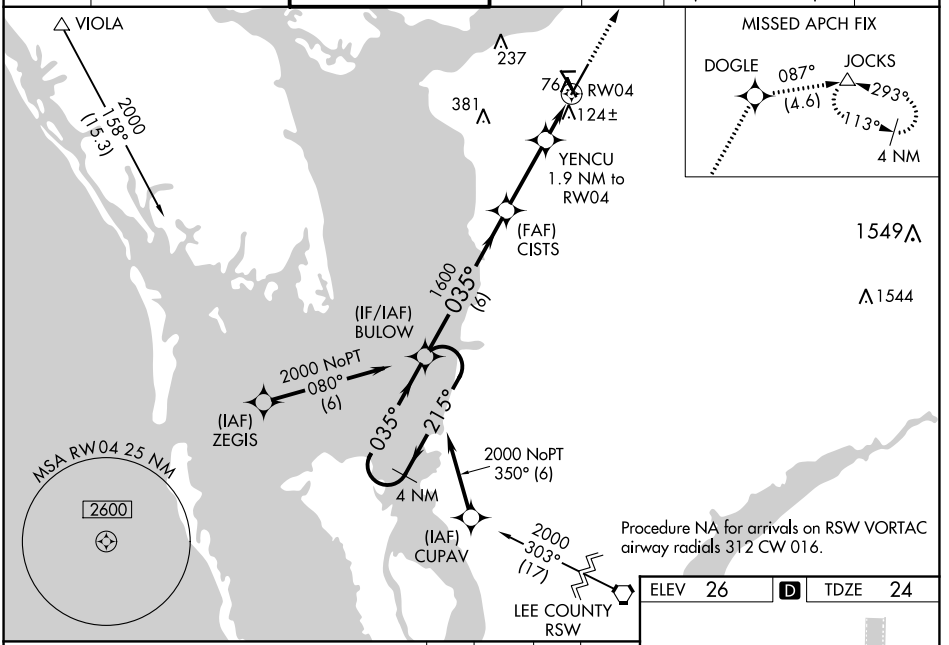

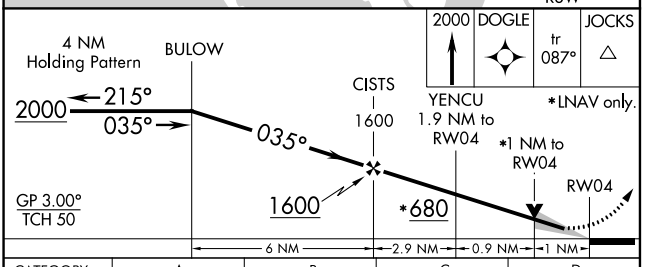

CATEGORY	A	B	C	D
LPV DA	224-¾ 200 (200-¾)			
LNAV/VNAV DA	393-1 369 (400-1)			
LNAV MDA	400-1 376 (400-1)			
C CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)

ELEV 26 D TDZE 24

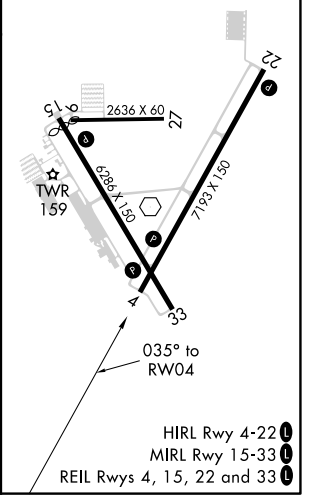

SE-3, 22 APR 2021 to 20 MAY 2021
SE-3, 22 APR 2021 to 20 MAY 2021